

# PANZERI

## Gilbert

220-240V AC dimmable (DALI/Push DIM)

P06501.045.0402

● white



### Data sheet


CODE	P06501.045.0402
SYSTEM POWER CONSUMPTION	20W
EFFICACY	92lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L90 (B10) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2301lm
LUMEN OUTPUT	1840lm
EFFICIENCY	80%
WEIGHT	5,12 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Ceiling lighting fixture for interiors, with direct and indirect light emission.  
Galvanized sheet metal ceiling bracket.  
Turned pickled sheet metal structure in white polyacrylic paint.  
Wall plate with lever-closing mechanism in pressed pickled sheet metal in white powder paint.  
Extruded aluminium heat sink.  
Diffuser in mat white blown glass.



### Technical drawing

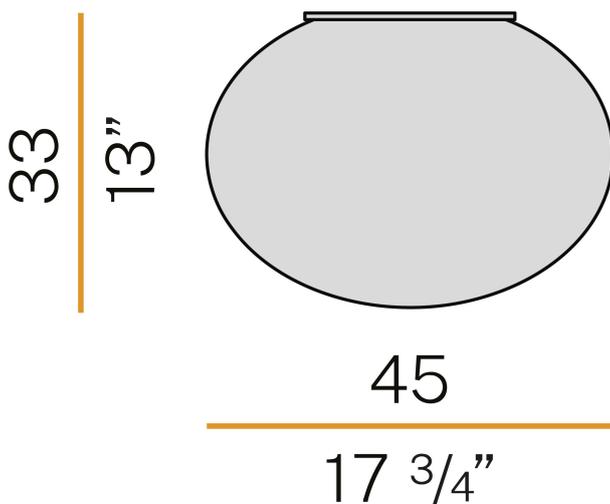

### Polar diagram

