

# PANZERI

## Silver Ring

220-240V AC dimmable (DALI/Push DIM)

P08201.120.0402

● white



### Data sheet


CODE	P08201.120.0402
SYSTEM POWER CONSUMPTION	75W
EFFICACY	69.77lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	10477lm
LUMEN OUTPUT	5233lm
EFFICIENCY	49.9%
WEIGHT	11,63 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	135,0 x 18,0 x 135,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.  
Pickled sheet metal structure in polyacrylic paint.  
Aluminium dissipation plates.  
Pickled sheet metal covers in white, black or bronze polyacrylic paint, or with gold leaf coating.  
Modelled polycarbonate diffuser with opaline finish.



### Technical drawing

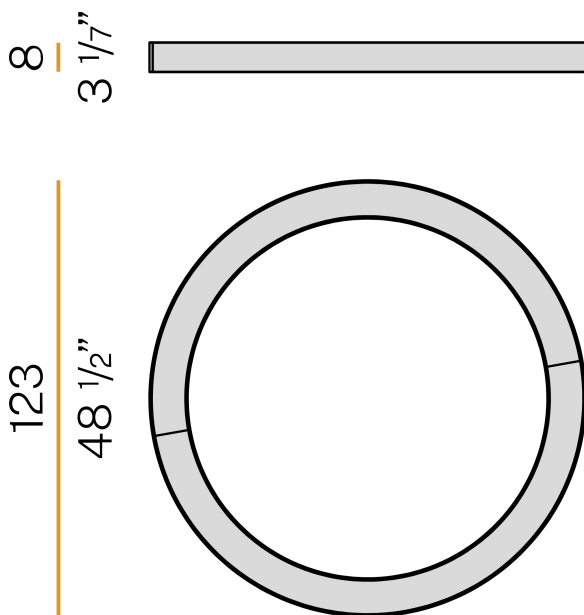

### Application



### Polar diagram

