

Planet Ring

220-240V AC dimmable (DALI/Push DIM)
P08301.040.0402

white




Data sheet

CODE	P08301.040.0402
SYSTEM POWER CONSUMPTION	28W
EFFICACY	78.54lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3321lm
LUMEN OUTPUT	2199lm
EFFICIENCY	66.2%
WEIGHT	3,85 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	46,0 x 16,0 x 46,0 cm



Ceiling lighting fixture for interiors, with direct light emission.
Pickled sheet metal structure in white polyacrylic paint.
Pickled sheet metal closing frame in polyacrylic paint.
Modelled polycarbonate diffuser with opaline finish.

Technical drawing

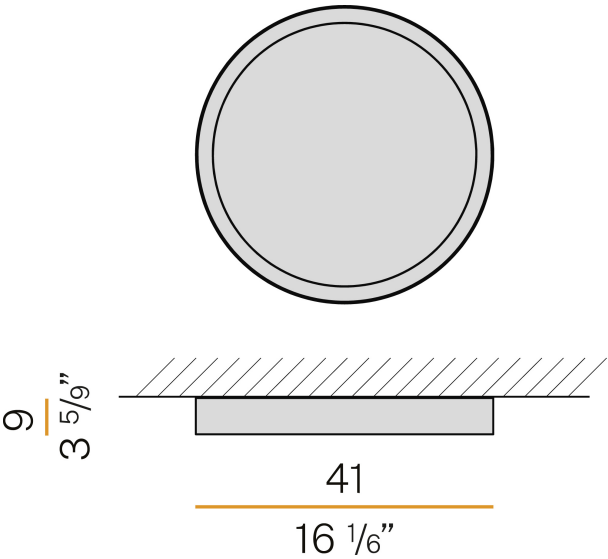

Application



Polar diagram

