

Planet Ring

220-240V AC emergency
P08301.100.0407

white




Data sheet

CODE	P08301.100.0407
SYSTEM POWER CONSUMPTION	142W
EFFICACY	82.58lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	emergency
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	17714lm
LUMEN OUTPUT	11727lm
EFFICIENCY	66.2%
DURATION IN EMERGENCY MODE	1h
WEIGHT	13,64 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	106,0 x 106,0 x 18,0 cm



Ceiling lighting fixture for interiors, with direct light emission.
Pickled sheet metal structure in white polyacrylic paint.
Aluminium dissipation plate.
Pickled sheet metal closing frame in polyacrylic paint.
Modelled polycarbonate diffuser with opaline finish.

Technical drawing

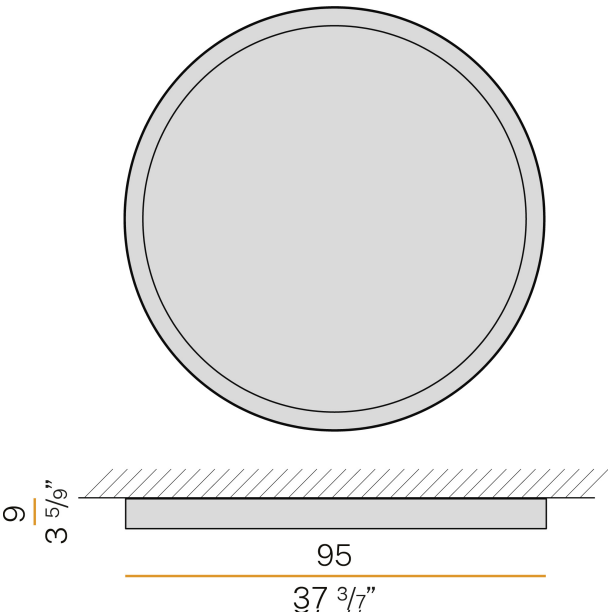

Application



Polar diagram

