

PANZERI

Dip

220-240V AC dimmable (DALI/Push DIM)

P08428.090.0502

 textured soft white



Data sheet

| | |
|--------------------------|--------------------------|
| CODE | P08428.090.0502 |
| SYSTEM POWER CONSUMPTION | 18W |
| EFFICACY | 107.28lm/W |
| LIGHT SOURCE | LED |
| COLOUR TEMPERATURE | 2700K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 3013lm |
| LUMEN OUTPUT | 1931lm |
| EFFICIENCY | 64.1% |
| WEIGHT | 2.99 Kg |
| PROTECTION DEGREE | IP40 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 49,0 x 119,0 x 19,0 cm |




Ceiling installation lighting fixture for interiors, with direct or indirect light emission. Power supply canopy with pickled sheet metal fixing bracket, deep-drawn sheet metal closing frame in polyacrylic paint.


Rotating arm up to 355° made of calendered steel tube with polyacrylic coating. Die-cast aluminum emitting head with polyacrylic paint in champagne, mat black, bronze and soft textured white finishes.

UV technology screen-printed diffuser, made of opal polycarbonate, installed with magnetic coupling.

Technical drawing

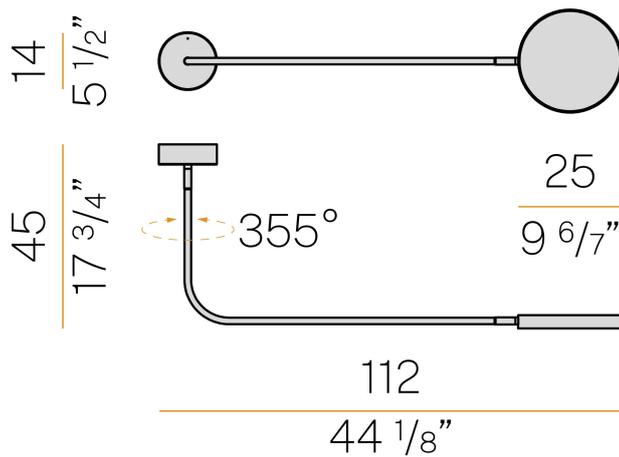

Polar diagram

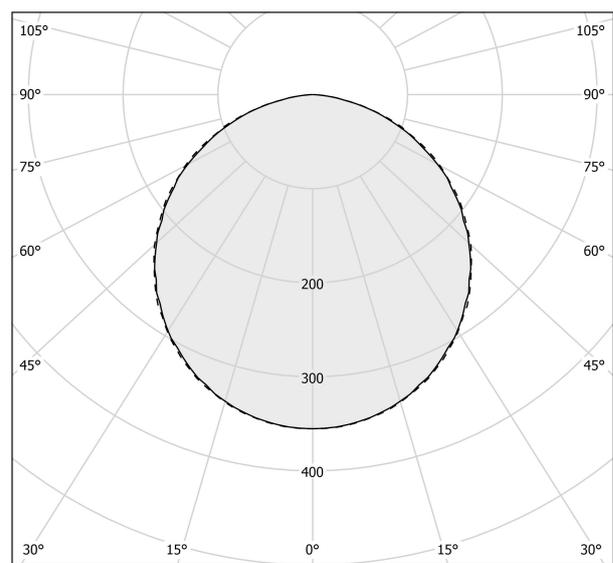

PANZERI

Dip

Accessories / diffusion

YKG08428.01

Anti-glare grid kit for Dip (indoor)

