


Ginevra

220-240V AC dimmable (DALI/Push DIM)  
P09281.080.0402




Data sheet

|                          |                          |
|--------------------------|--------------------------|
| CODE                     | P09281.080.0402          |
| SYSTEM POWER CONSUMPTION | 71W                      |
| EFFICACY                 | 94.97lm/W                |
| LIGHT SOURCE             | LED                      |
| LIGHT SOURCE LIFETIME    | L80 (B20) 80.000h        |
| COLOUR TEMPERATURE       | 3000K Ra>90              |
| LIGHT DISTRIBUTION       | diffused                 |
| POWER SUPPLY             | 220-240V AC              |
| FREQUENCY                | 50/60Hz                  |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER                   | integrated included      |
| NOMINAL LUMINOUS FLUX    | 8857lm                   |
| LUMEN OUTPUT             | 6743lm                   |
| EFFICIENCY               | 76.1%                    |
| GLARE RATING             | UGR < 19                 |
| WEIGHT                   | 10,07 Kg                 |
| PROTECTION DEGREE        | IP20                     |
| COLOUR TOLLERANCES       | SDCM <3                  |
| PACKING DIMENSIONS       | 18,0 x 90,0 x 90,0 cm    |



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Turned aluminium structure in mat black and gold or white and gold polyacrylic paint.  
Pickled sheet metal wiring support plate in polyacrylic paint.  
Moulded polycarbonate micro-prismatic diffuser.

Technical drawing

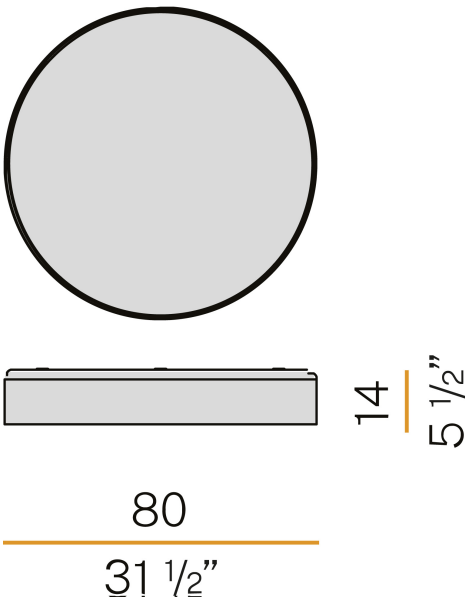

Application



Polar diagram

