

Superbold

220-240V AC dimmable (phase cut)  
P09917.045.0504




Data sheet

|                          |                      |
|--------------------------|----------------------|
| CODE                     | P09917.045.0504      |
| SYSTEM POWER CONSUMPTION | 21W                  |
| EFFICACY                 | 67.33lm/W            |
| LIGHT SOURCE             | LED                  |
| COLOUR TEMPERATURE       | 2700K Ra>90          |
| LIGHT DISTRIBUTION       | diffused             |
| POWER SUPPLY             | 220-240V AC          |
| FREQUENCY                | 50/60Hz              |
| ELECTRICAL CONFIGURATION | dimmable (phase cut) |
| DRIVER                   | integrated included  |
| NOMINAL LUMINOUS FLUX    | 3172lm               |
| LUMEN OUTPUT             | 1414lm               |
| EFFICIENCY               | 44.6%                |
| WEIGHT                   | 2,22 Kg              |
| PROTECTION DEGREE        | IP40                 |
| COLOUR TOLLERANCES       | SDCM <3              |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm   |



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Turned steel structure in textured soft white, mat black, champagne, bronze, textured myrtle blue and textured natural terracotta polyacrylic paint.  
Aluminium wiring support plate with polyacrylate paint finish.  
Curved diffuser screen made of matt PMMA technopolymer.  
DALI/Push DIM driver available on request.

Technical drawing

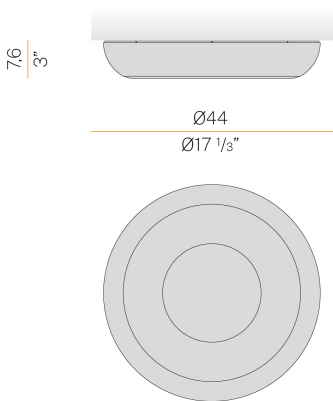

Application

