

Superbold

220-240V AC dimmable (phase cut)
P09926.045.0504

 textured myrtle blue




Data sheet

CODE	P09926.045.0504
SYSTEM POWER CONSUMPTION	21W
EFFICACY	67.33lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (phase cut)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3172lm
LUMEN OUTPUT	1414lm
EFFICIENCY	44.6%
WEIGHT	2,22 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.
Turned steel structure in textured soft white, mat black, champagne, bronze, textured myrtle blue and textured natural terracotta polyacrylic paint.
Aluminium wiring support plate with polyacrylate paint finish.
Curved diffuser screen made of matt PMMA technopolymer.
DALI/Push DIM driver available on request.

Technical drawing

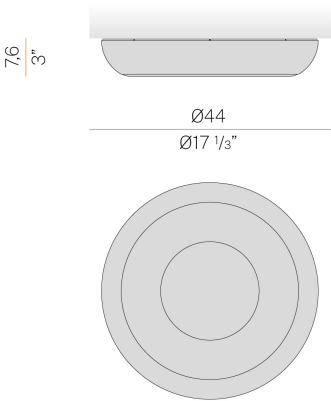

Application

