


Roris

220-240V AC
P11206.008.0500




Data sheet

CODE	P11206.008.0500
SYSTEM POWER CONSUMPTION	24W
EFFICACY	53lm/W
LIGHT SOURCE	LED retrofit / halogen
LIGHT SOURCE KIT	* included
COLOUR TEMPERATURE	2700K Ra>80
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
NOMINAL LUMINOUS FLUX	2000lm
LUMEN OUTPUT	1272lm
EFFICIENCY	63.6%
WEIGHT	2,71 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <6
PACKING DIMENSIONS	100,0 x 100,0 x 92,0 cm



Light fixture for indoor ceiling installation, with diffuse emission.
Steel, aluminum and brass structure.
No.8 blown glass with diffusing finish.
Die-cast aluminum canopy with ceiling mounting bracket made of galvanized sheet metal.
Polyacrylic paint finish in mat black or mat brass.
Max 8x 4W G9.
Dimmable G9 2700K LED sources included.

Technical drawing

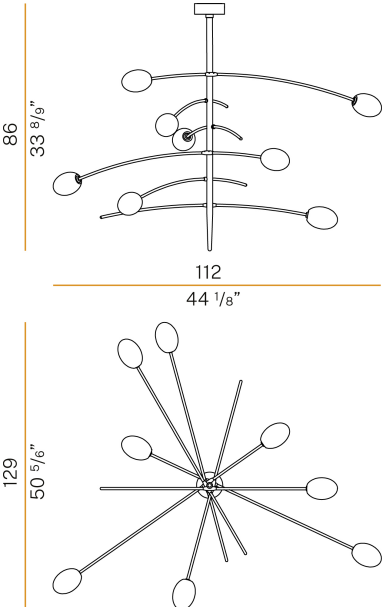

Polar diagram

