PANZERI

# Lola

220-240V AC dimmable (phase cut)
P12001.020.1704

DIRECT LIGHT

## Data sheet

| | |
|---|---|
| CODE | P12001.020.1704 |
| SYSTEM POWER CONSUMPTION | 9W |
| EFFICACY | 108lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B10) 50.000h |
| COLOUR TEMPERATURE | 2700K Ra>90 |
| LIGHT DISTRIBUTION | adjustable |
| BEAM ANGLE | 24° |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (phase cut) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 1170lm |
| LUMEN OUTPUT | 972lm |
| EFFICIENCY | 83.1% |
| GLARE RATING | UGR < 11 |
| WEIGHT | 0,60 Kg |
| PROTECTION DEGREE | IP20 |
| GLOW WIRE TEST PERFORMANCE | 850° |
| PACKING DIMENSIONS | 12,0 x 29,5 x 11,0 cm |

Ceiling or wall lighting fixture for interiors, with swivelling light beam.
Ceiling/wall plate in die-cast aluminium with polyacrylic paint.
Electrical connection housing in die-cast aluminium with polyacrylic paint.
Die-cast aluminium joint with polyacrylic paint.
Die-cast aluminium structure rotating on two axes in white, black, bronze, mat brass or titanium polyacrylic paint.
Reflector in thermoplastic material with chrome plated finish.

## Technical drawing

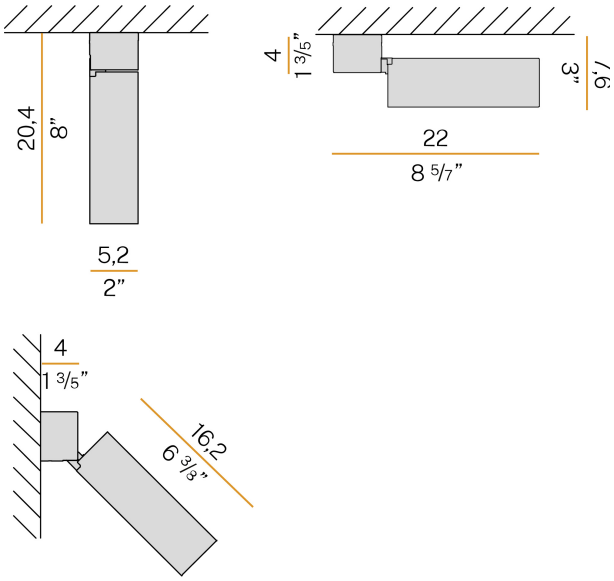


## Application
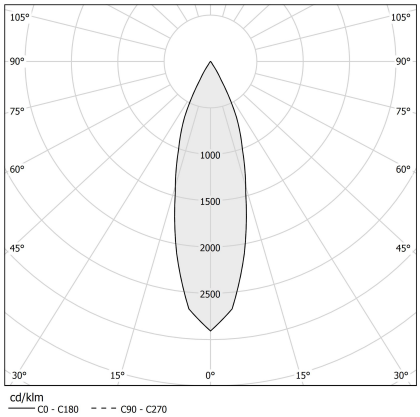
## Polar diagram