

PANZERI

Carl2

220-240V AC dimmable (1-10V/Push DIM)

P12502.033.0403

● black




Data sheet

| | |
|--------------------------|---------------------------|
| CODE | P12502.033.0403 |
| SYSTEM POWER CONSUMPTION | 43W |
| EFFICACY | 66.79lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B10) 50.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | adjustable |
| BEAM ANGLE | 30° |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | dimmable (1-10V/Push DIM) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 4102lm |
| LUMEN OUTPUT | 2872lm |
| EFFICIENCY | 70% |
| GLARE RATING | UGR < 16 |
| WEIGHT | 1,20 Kg |
| PROTECTION DEGREE | IP20 |
| PACKING DIMENSIONS | 16,0 x 39,0 x 16,0 cm |



Ceiling or wall lighting fixture for interiors, with swivelling light beam.
Pickled sheet metal ceiling/wall bracket in polyacrylic paint.
Pickled sheet metal structure in white, black, bronze, mat brass or titanium polyacrylic paint.
Die-cast aluminium joints with polyacrylic paint.
Die-cast aluminium projectors rotating on two axes in polyacrylic paint.
Reflectors in thermoplastic material with chrome plated finish.
Textured glass screens.
Anti-glare snoots in black thermoplastic material.

Technical drawing

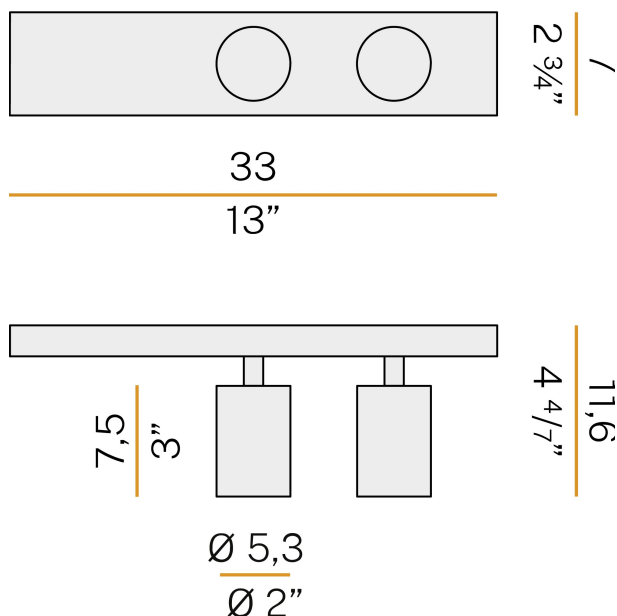

Application



Polar diagram

