

# PANZERI

## Brooklyn Round

220-240V AC dimmable (DALI/Push DIM)

P23202.360.0402



### Data sheet


CODE	P23202.360.0402
SYSTEM POWER CONSUMPTION	109W
EFFICACY	54.4lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	13680lm
LUMEN OUTPUT	5931lm
EFFICIENCY	43.4%
WEIGHT	5,83 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	202,0 x 202,0 x 13,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Bended extruded aluminium structure in white, black or mat brass polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Turned brass ceiling-fastening spacers in polyacrylic paint.



### Technical drawing

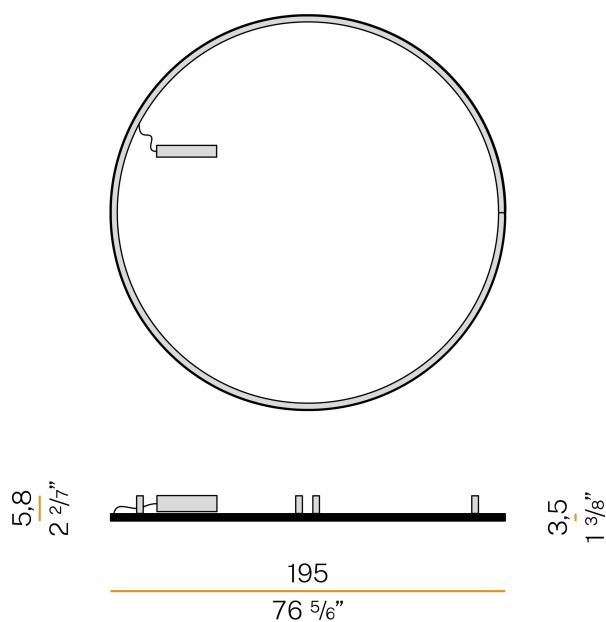

### Application



### Polar diagram

