

PANZERI

Hilow Line

220-240V AC dimmer on cable

T10705.200.0522

 champagne

INDIRECT
LIGHT


Data sheet

CODE	T10705.200.0522
SYSTEM POWER CONSUMPTION	39W
EFFICACY	69.59lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B10) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmer on cable
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4032lm
LUMEN OUTPUT	2714lm
EFFICIENCY	67.3%
WEIGHT	10,01 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Floor lighting fixture for interiors, with indirect light emission.
Bearing base in "verde alpi" marble.
Extruded aluminium structure in mat black, bronze or mat brass polyacrylic paint.
Die-cast aluminium end caps in polyacrylic paint.
Extruded polycarbonate diffuser with opaline finish.
Supplied with 3m (118,1") long black fabric power cord complete with box with push-button for adjusting light intensity and plug adapter.

Technical drawing

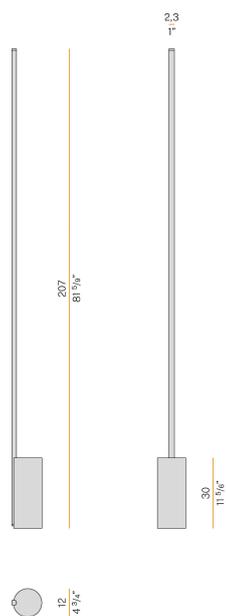

Polar diagram

