

Hilow Line

220-240V AC dimmer on cable  
T10706.200.0422




Data sheet

|                          |                     |
|--------------------------|---------------------|
| CODE                     | T10706.200.0422     |
| SYSTEM POWER CONSUMPTION | 39W                 |
| EFFICACY                 | 69.59lm/W           |
| LIGHT SOURCE             | LED                 |
| LIGHT SOURCE LIFETIME    | L70 (B10) 60.000h   |
| COLOUR TEMPERATURE       | 3000K Ra>90         |
| LIGHT DISTRIBUTION       | diffused            |
| POWER SUPPLY             | 220-240V AC         |
| FREQUENCY                | 50/60Hz             |
| ELECTRICAL CONFIGURATION | dimmer on cable     |
| DRIVER                   | integrated included |
| NOMINAL LUMINOUS FLUX    | 4032lm              |
| LUMEN OUTPUT             | 2714lm              |
| EFFICIENCY               | 67.3%               |
| WEIGHT                   | 10,01 Kg            |
| PROTECTION DEGREE        | IP20                |
| COLOUR TOLLERANCES       | SDCM 3              |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm  |



Floor lighting fixture for interiors, with indirect light emission.  
Bearing base in "verde alpi" marble.  
Extruded aluminium structure in mat black, bronze or mat brass polyacrylic paint.  
Die-cast aluminium end caps in polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Supplied with 3m (118,1") long black fabric power cord complete with box with push-button for adjusting light intensity and plug adapter.

Technical drawing

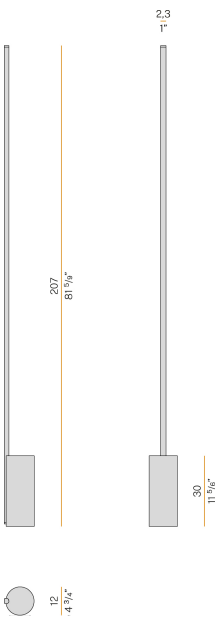

Polar diagram

