

Adamas

220-240V AC dimmable (Push DIM)
T18306.033.0527





Data sheet

CODE	T18306.033.0527
SYSTEM POWER CONSUMPTION	11W
EFFICACY	67.82lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1344lm
LUMEN OUTPUT	746lm
EFFICIENCY	55,5%
WEIGHT	9,84 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Technical drawing

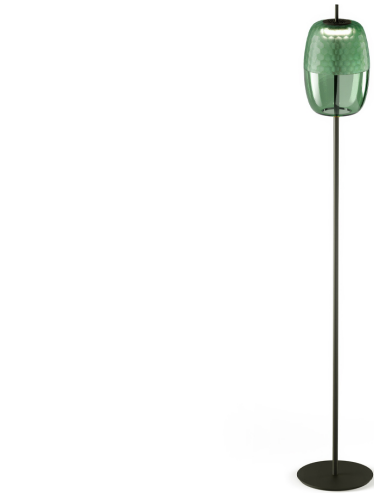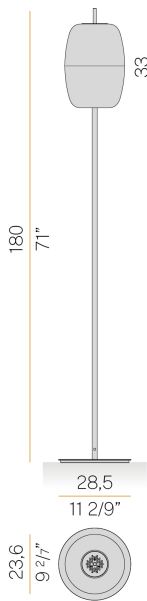

Floor lighting fixture for interiors, with direct light emission.
Aluminium frame and steel tube stem with polyacrylic paint finish in mat black or mat brass.
Diffuser screen in acrylic material with satin finish.
Handmade and hand-ground blown glass in forest green colour.
Steel closing plate with polyacrylic paint finish.
Metal base with polyacrylic paint in mat black or mat brass finish.
Supplied with 2,5m (98,4") long black fabric power cord complete with box with push-button for adjusting light intensity and plug adapter.

Polar diagram