

# PANZERI

## Mark

24V DC  
X01701.030.0410

white



### Data sheet

CODE	X01701.030.0410
SYSTEM POWER CONSUMPTION	8,5W
EFFICACY	45.25lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	1076lm
LUMEN OUTPUT	362lm
EFFICIENCY	33.6%
WEIGHT	0,60 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	10,5 x 45,0 x 10,5 cm



Lighting fixture for ceiling or wall built-in installation for interiors, with direct light emission.

Built-in structure in plasterboard, in aluminium in white polyacrylic paint.




Reflector in aluminium in white polyacrylic paint.

Pickled sheet metal closing frame in white, black, bronze, mat brass or titanium polyacrylic paint.

Stainless steel spring clips for plasterboard fixing.

Built-in hole dimension: 280x67mm (11x2,6")

### Technical drawing

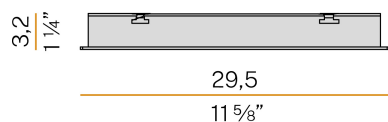

### Application



### Polar diagram

