

Planet Ring

220-240V AC ON-OFF
X08301.040.0401

white




Data sheet

CODE	X08301.040.0401
SYSTEM POWER CONSUMPTION	28W
EFFICACY	78.54lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3321lm
LUMEN OUTPUT	2199lm
EFFICIENCY	66.2%
WEIGHT	4,12 Kg
PROTECTION DEGREE	IP40 IP20
COLOUR TOLLERANCES	SDCM 3
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	46,0 x 18,0 x 46,0 cm



Lighting fixture for ceiling built-in installation for interiors, with direct light emission. Built-in structure for permanent false ceilings, in pickled sheet metal in white polyacrylic paint. Pickled sheet metal closing frame in polyacrylic paint. Modelled polycarbonate diffuser with opaline finish. Galvanized sheet metal brackets for false ceiling fixing. Built-in hole dimension: Ø 415mm (Ø 16,3")

Technical drawing

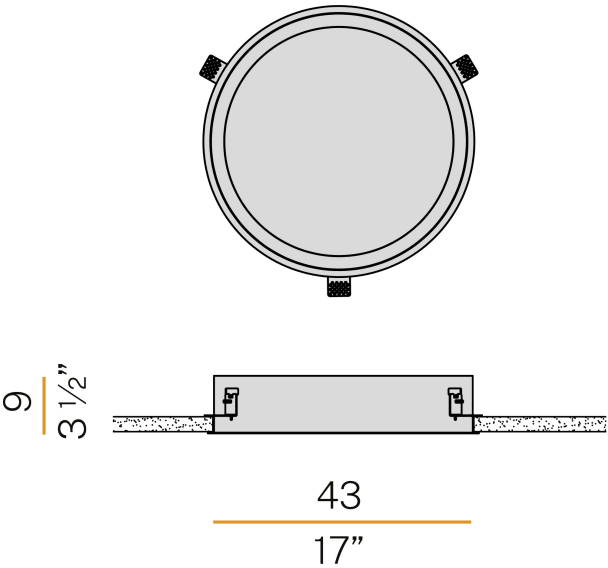

Polar diagram

