

PANZERI

Lola

500mA DC dimmable (DALI/Push DIM)

X12002.020.3602




Data sheet

| | |
|----------------------------|--------------------------|
| CODE | X12002.020.3602 |
| SYSTEM POWER CONSUMPTION | 18W |
| EFFICACY | 110.83lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B10) 50.000h |
| COLOUR TEMPERATURE | 2700K Ra>85 |
| LIGHT DISTRIBUTION | adjustable |
| BEAM ANGLE | 24° |
| POWER SUPPLY | 500mA DC |
| ELECTRICAL CONFIGURATION | dimmable (DALI/Push DIM) |
| DRIVER | remote included |
| NOMINAL LUMINOUS FLUX | 2400lm |
| LUMEN OUTPUT | 1995lm |
| EFFICIENCY | 83.1% |
| GLARE RATING | UGR < 12 |
| WEIGHT | 0,52 Kg |
| PROTECTION DEGREE | IP20 |
| GLOW WIRE TEST PERFORMANCE | 850° |
| PACKING DIMENSIONS | 12,0 x 29,5 x 11,0 cm |



Lighting fixture for ceiling semi-built-in installation for interiors, with swivelling light beam.
 Built-in ceiling plate for permanent false ceilings, in pickled sheet metal with polyacrylic paint.
 Turned brass joint.
 Die-cast aluminium structure rotating on two axes in white, black, bronze, mat brass or titanium polyacrylic paint.
 Reflector in thermoplastic material with chrome plated finish.
 Anti-glare snoot in black thermoplastic material.
 Stainless steel spring clips for false ceiling fixing.
 Equipped with 0,4m (15,7") long power cable.
 Built-in hole dimension: Ø 65mm (Ø 2,6")

Technical drawing

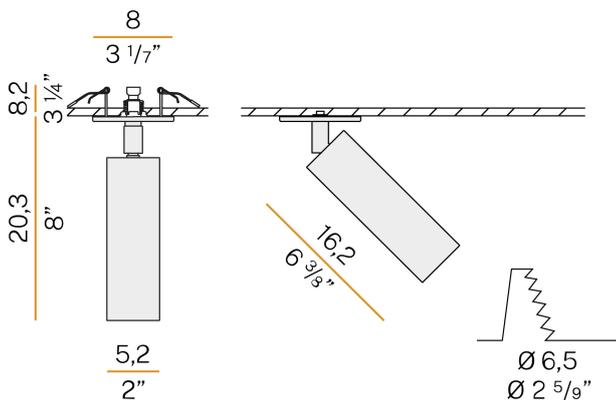

Polar diagram

