


# PANZERI

## Lola

500mA DC dimmable (DALI/Push DIM)

X12019.020.4002

 mat brass

DIRECT  
LIGHT


### Data sheet

CODE	X12019.020.4002
SYSTEM POWER CONSUMPTION	18W
EFFICACY	110,83lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	3000K Ra>85
LIGHT DISTRIBUTION	adjustable
BEAM ANGLE	24°
POWER SUPPLY	500mA DC
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	remote included
NOMINAL LUMINOUS FLUX	2400lm
LUMEN OUTPUT	1995lm
EFFICIENCY	83,1%
GLARE RATING	UGR < 12
WEIGHT	0,52 Kg
PROTECTION DEGREE	IP20
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	12,0 x 29,5 x 11,0 cm



Lighting fixture for ceiling semi-built-in installation for interiors, with swivelling light beam.  
 Built-in ceiling plate for permanent false ceilings, in pickled sheet metal with polyacrylic paint.  
 Turned brass joint.  
 Die-cast aluminium structure rotating on two axes in white, black, bronze, mat brass or titanium polyacrylic paint.  
 Reflector in thermoplastic material with chrome plated finish.  
 Anti-glare snoot in black thermoplastic material.  
 Stainless steel spring clips for false ceiling fixing.  
 Equipped with 0,4m (15,7") long power cable.  
 Built-in hole dimension: Ø 65mm (Ø 2,6")

### Technical drawing

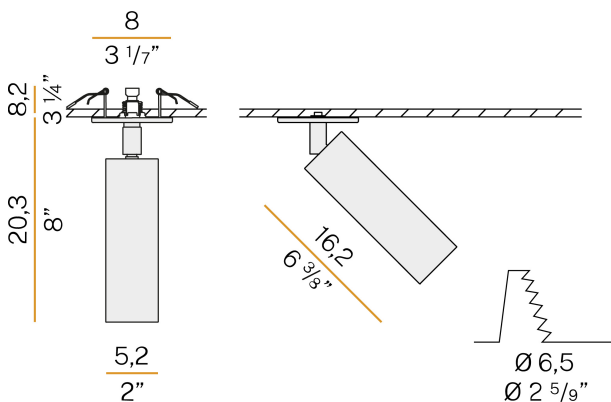

### Polar diagram

