


# PANZERI

## Carl

500mA DC dimmable (DALI/Push DIM)

X12317.010.1702




### Data sheet

CODE	X12317.010.1702
SYSTEM POWER CONSUMPTION	18W
EFFICACY	79.78lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	adjustable
BEAM ANGLE	30°
POWER SUPPLY	500mA DC
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	remote included
NOMINAL LUMINOUS FLUX	2051lm
LUMEN OUTPUT	1436lm
EFFICIENCY	70%
GLARE RATING	UGR < 16
WEIGHT	0,29 Kg
PROTECTION DEGREE	IP20
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	13,0 x 15,0 x 9,0 cm



### Technical drawing

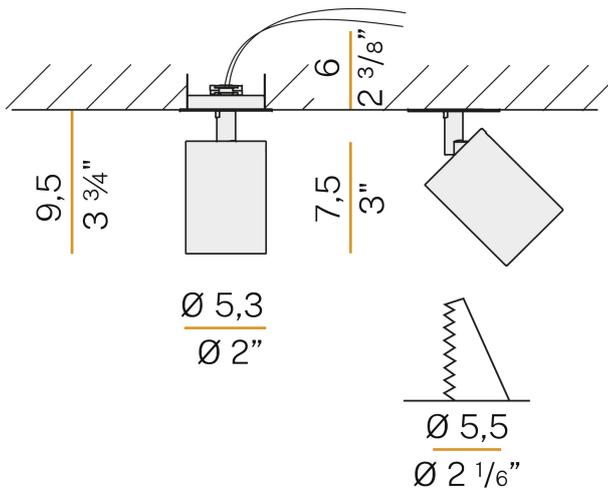

Lighting fixture for ceiling semi-built-in installation for interiors, with swivelling light beam.  
 Built-in ceiling plate for permanent false ceilings, in die-cast aluminium with polyacrylic paint.  
 Die-cast aluminium joint with polyacrylic paint.  
 Die-cast aluminium structure rotating on two axes in white, black, bronze, mat brass or titanium polyacrylic paint.  
 Reflector in thermoplastic material with chrome plated finish.  
 Textured glass screen.  
 Anti-glare snoot in black thermoplastic material.  
 Stainless steel spring clips for false ceiling fixing.  
 Equipped with 0,4m (15,7") long power cable.  
 Built-in hole dimension: Ø 55mm (Ø 2.2")

### Polar diagram

