

# PANZERI

## Carl

700mA DC ON-OFF

X12319.007.1701

 matte brass

DIRECT  
LIGHT


### Data sheet

CODE	X12319.007.1701
SYSTEM POWER CONSUMPTION	6,5W
EFFICACY	70.83lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	adjustable
BEAM ANGLE	34°
POWER SUPPLY	700mA DC
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	remote included
NOMINAL LUMINOUS FLUX	650lm
LUMEN OUTPUT	425lm
EFFICIENCY	65.4%
GLARE RATING	UGR < 12
WEIGHT	0,11 Kg
PROTECTION DEGREE	IP20
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	8,0 x 12,5 x 8,0 cm



Lighting fixture for ceiling semi-built-in installation for interiors, with swivelling light beam.  
 Built-in ceiling plate for permanent false ceilings, in die-cast aluminium with polyacrylic paint.  
 Die-cast aluminium joint with polyacrylic paint.  
 Die-cast aluminium structure rotating on two axes in white, black, bronze, mat brass or titanium polyacrylic paint.  
 Reflector in thermoplastic material with chrome plated finish.  
 Textured glass screen.  
 Anti-glare snoot in black thermoplastic material.  
 Stainless steel spring clips for false ceiling fixing.  
 Equipped with 0,4m (15,7") long power cable.  
 Built-in hole dimension: Ø 42mm (Ø 1,7")

### Technical drawing

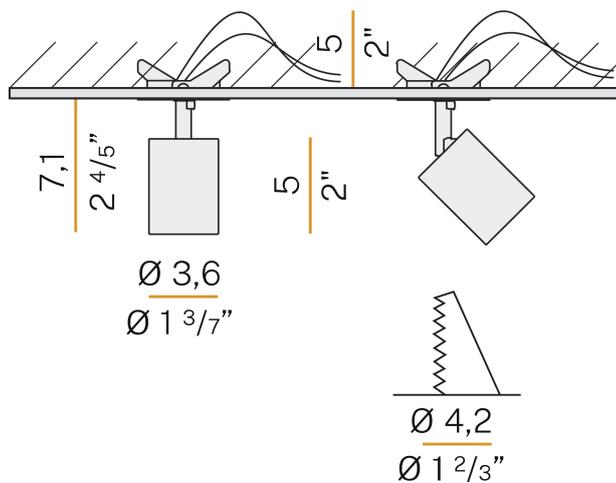

### Polar diagram

