

Bug Halo

220-240V AC constant current  
X20101.075.2515

white



Data sheet


|                          |                     |
|--------------------------|---------------------|
| CODE                     | X20101.075.2515     |
| SYSTEM POWER CONSUMPTION | 5W                  |
| EFFICACY                 | 140lm/W             |
| LIGHT SOURCE             | LED                 |
| LIGHT SOURCE KIT         | included            |
| LIGHT SOURCE LIFETIME    | L90 (B10) 50.000h   |
| COLOUR TEMPERATURE       | 3000K Ra>90         |
| LIGHT DISTRIBUTION       | flood               |
| BEAM ANGLE               | 36°                 |
| POWER SUPPLY             | 220-240V AC         |
| FREQUENCY                | 50/60Hz             |
| ELECTRICAL CONFIGURATION | constant current    |
| DRIVER                   | remote not included |
| NOMINAL LUMINOUS FLUX    | 900lm               |
| LUMEN OUTPUT             | 700lm               |
| EFFICIENCY               | 77.8%               |
| WEIGHT                   | 0.00 Kg             |
| PROTECTION DEGREE        | IP44                |
| COLOUR TOLLERANCES       | SDCM <3             |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm  |



Recessed spotlight for indoor use, designed for installation in plasterboard ceilings.  
Heat sink body in black die-cast aluminium.  
Recessed, flush-mounted lens for the light source, made from machined aluminium, available in white, black or in the brushed metallic finishes of champagne, brass, bronze and titanium.  
Recessed 2700K or 3000K LED light source available with 24° and 36° beam angles.  
Plasterboard mounting frame and driver not included; to be purchased separately.



Technical drawing

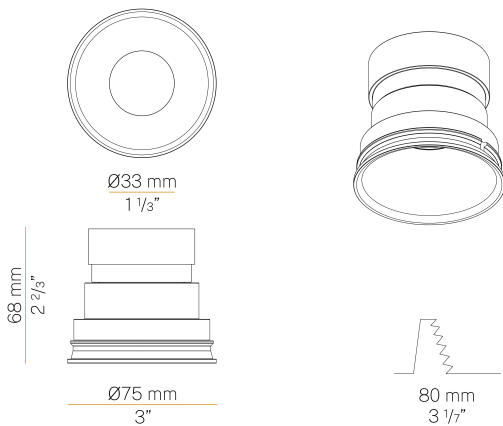

Application



Polar diagram

# PANZERI

## Bug Halo

### Accessories / fixing

YCF20100.075

Flush-mounting installation structure. Mandatory accessory.

