

Bug Halo


220-240V AC constant current
X20117.075.1715

 brushed bronze




Data sheet

CODE	X20117.075.1715
SYSTEM POWER CONSUMPTION	5W
EFFICACY	140lm/W
LIGHT SOURCE	LED
LIGHT SOURCE KIT	included
LIGHT SOURCE LIFETIME	L90 (B10) 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	flood
BEAM ANGLE	36°
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	constant current
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	900lm
LUMEN OUTPUT	700lm
EFFICIENCY	77.8%
WEIGHT	0.00 Kg
PROTECTION DEGREE	IP44
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Recessed spotlight for indoor use, designed for installation in plasterboard ceilings.
Heat sink body in black die-cast aluminium.
Recessed, flush-mounted lens for the light source, made from machined aluminium, available in white, black or in the brushed metallic finishes of champagne, brass, bronze and titanium.
Recessed 2700K or 3000K LED light source available with 24° and 36° beam angles.
Plasterboard mounting frame and driver not included; to be purchased separately.

Technical drawing

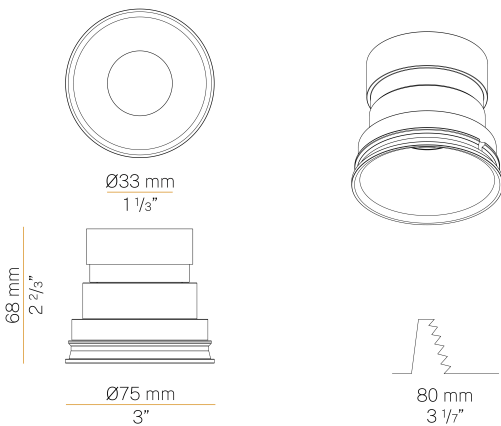

Application



Polar diagram

PANZERI

Bug Halo

Accessories / fixing

YCF20100.075

Flush-mounting installation structure. Mandatory accessory.

