

Brooklyn

24V DC

XG2033-100TRACK



Data sheet

CODE	XG2033-100TRACK
SYSTEM POWER CONSUMPTION	max 24W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	0.83 Kg
PROTECTION DEGREE	IP40 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	6.0 x 6.0 x 114.0 cm
L (mm)	1010
L (in)	39 4/5"
ADVISED BRACKETS	2
HOLE (mm)	1015 x 40
HOLE (in)	40" x 1 3/8"



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish.


Equipped with disposal screen for smoothing, plastering and painting of the installation surface.

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 1015x40mm (40x1,6")


Technical drawing

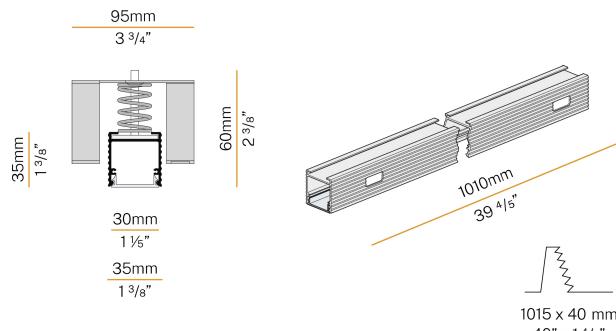

Application



Polar diagram

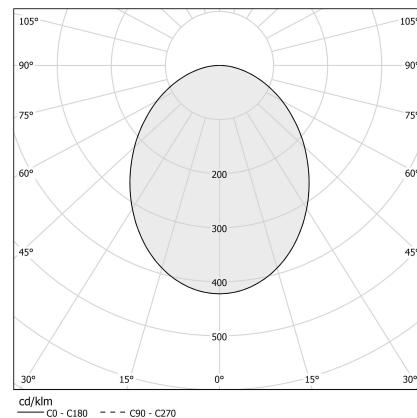

PANZERI

Brooklyn

Accessories / source

XM006.012.0410 LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



XM006.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



YLR005.010.0410 LED STRIP: 5m/5cm 9.6W/m 3000K CRI90 24V 1220lm/m



YLR005.010.0510 LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m



YLR005.010.0610 LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m



YLR006.017.0410 LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m



YLR006.017.0510 LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m




YLR006.017.0610 LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m



Accessories / power supply

XM6-20 UNI

LED driver, 4÷20W 250÷700mA.




YDV.024.030.A01

LED driver, 30W 24V DC.



YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.



PANZERI

Brooklyn

Accessories / connection

XM2033/34/32/31-S

Power cables.



PANZERI

Brooklyn

Accessories / diffusion

XM2033/34-WHI White reflector with 1000mm (39,4") lenght to be cut.



CE **EAC** **W**

XM2033/34/45/46-1200S Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.



CE **EAC** **W**

XM2033/34/45/46-600S Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



CE **EAC** **W**

XM2033/34/45/46-900S Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.



CE **EAC** **W**


PANZERI

Brooklyn

Accessories / fixing

XM2033-F

Drywall fixing bracket for trimless recessed profiles.




XM2033/34-L

Pair of fixing plates for recessed installation in brick wall or concrete.



XM2033/34/38/39P


Plate for hanging.



Accessories / junction


XM2033-U45

Two profiles level junction with 45° cut, for total built-in installation.



XM2033-U90

Connection joint for two lines of modular profiles with level junction 90°, for total built-in installation.



XM2033-UT

Three profiles "T" level junction, for total built-in installation.




XM2033-X

Four profiles "X" level junction, for total built-in installation.




XM2033/34-ANG

Two profiles perpendicular junction with 45° cut.



XM2033/34-U

Linear junction.



PANZERI

Brooklyn

Accessories / closing

XM2033-T

Pair of end caps with screws for trimless recessed profiles.

