### Brooklyn

24V DC

XG2033-100TRACK





#### Data sheet

CODE	XG2033-100TRACK
SYSTEM POWER CONSUMPTION	max 24W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	0,83 Kg
PROTECTION DEGREE	IP40 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	6,0 x 6,0 x 114,0 cm
L (mm)	1010
L (in)	39 4/5"
ADVISED BRACKETS	2
HOLE (mm)	1015 x 40
HOLE (in)	40" x 1 3/8"









Modular profile for ceiling or wall built-in installation for interiors, with direct light

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish.


 $\label{prop:continuous} \mbox{Equipped with disposal screen for smoothing, plastering and painting of the installation}$ 

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 1015x40mm (40x1,6")


#### **Technical drawing**



#### **Application**



#### Polar diagram



cd/klm C0 - C180 - - - C90 - C270

### Brooklyn

#### Accessories / source

LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm. XM006.012.0410 CE EHI 🕸 ----XM006.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm. C€ EHI ŵ ----YLR005.010.0410 LED STRIP: 5m/5cm 9.6W/m 3000K CRI90 24V 1220lm/m CE [HI 🕸 LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m YLR005.010.0510 CE [HI 🕸 YLR005.010.0610 LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m CE EHI 🕸 YLR006.017.0410 LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m CE EHI 🕸 YLR006.017.0510 LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m CE EHI 🕸


LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m

YLR006.017.0610

CE EHI 🕸

### Brooklyn

#### Accessories / power supply

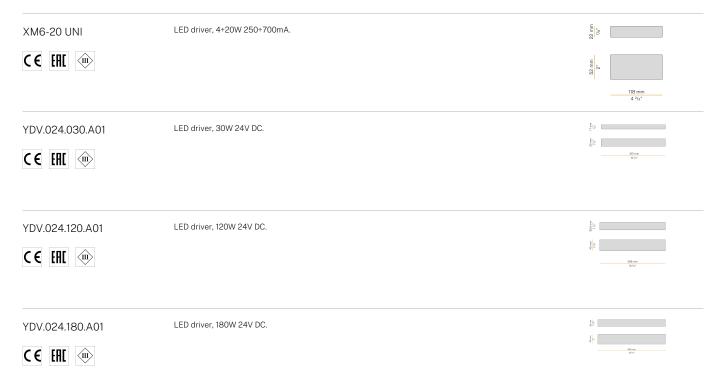

### Brooklyn

#### Accessories / connection

XM2033/34/32/31-S

Power cables.





### Brooklyn

#### Accessories / diffusion

XM2033/34-WHI

White reflector with 1000mm (39,4") lenght to be cut.



CE EHI 🕸

XM2033/34/45/46-1200S

Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.



C € ERI ®

Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



C€ [H[ ŵ



XM2033/34/45/46-600S

XM2033/34/45/46-900S

Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.







### Brooklyn

#### Accessories / fixing

XM2033-F

Drywall fixing bracket for trimless recessed profiles.



XM2033/34-L

CE EHI 🕸

Pair of fixing plates for recessed installation in brick wall or concrete.







CE EHI 🕸

XM2033/34/38/39P

Plate for hanging.










### Brooklyn

#### Accessories / junction

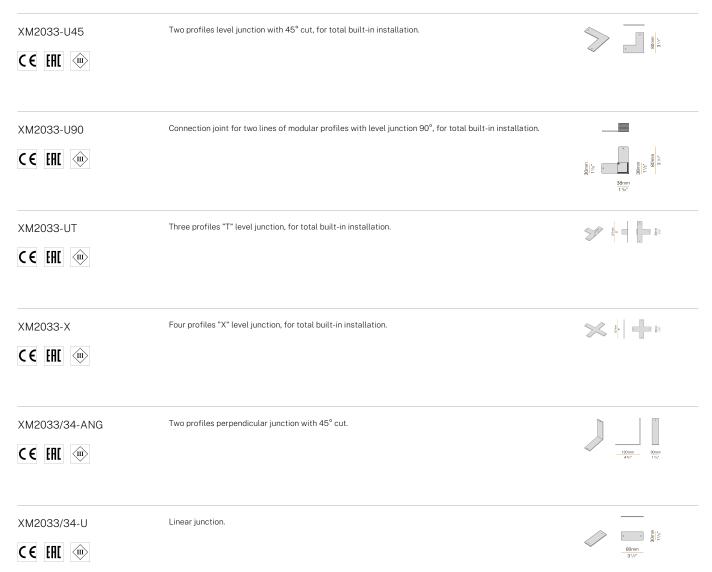

### Brooklyn

#### Accessories / closing

XM2033-T

C€ EHI ŵ

Pair of end caps with screws for trimless recessed profiles.



