Brooklyn

24V DC

XG2033-200TRACK





Data sheet

| CODE | XG2033-200TRACK |
|----------------------------|----------------------|
| SYSTEM POWER CONSUMPTION | max 24W/m |
| LIGHT SOURCE | LED |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 24V DC |
| DRIVER | remote not included |
| WEIGHT | 1,48 Kg |
| PROTECTION DEGREE | IP40 IP20 |
| SHOCK RESISTANCE RATING | IK08 |
| GLOW WIRE TEST PERFORMANCE | 850° |
| PACKING DIMENSIONS | 6,0 x 6,0 x 214,0 cm |
| L (mm) | 2010 |
| L (in) | 79 1/5" |
| ADVISED BRACKETS | 3 |
| HOLE (mm) | 2015 x 40 |
| HOLE (in) | 79 2/5" ×1 3/8" |
| | |









Modular profile for ceiling or wall built-in installation for interiors, with direct light

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish.


Equipped with disposal screen for smoothing, plastering and painting of the installation $% \left(1\right) =\left(1\right) \left(1\right)$

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 2015x40mm (79,3x1,6")


Technical drawing



Application



Polar diagram



cd/klm C0 - C180 - - - C90 - C270

Brooklyn

Accessories / source LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm. XM006.012.0410 CE EHI 🕸 ----XM006.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm. C€ EHI ŵ ----YLR005.010.0410 LED STRIP: 5m/5cm 9.6W/m 3000K CRI90 24V 1220lm/m CE [HI 🕸 LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m YLR005.010.0510 CE [HI 🕸 YLR005.010.0610 LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m CE EHI 🕸 YLR006.017.0410 LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m CE EHI 🕸 YLR006.017.0510 LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m CE EHI 🕸


LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m

YLR006.017.0610

CE EHI 🕸

Brooklyn

Accessories / power supply

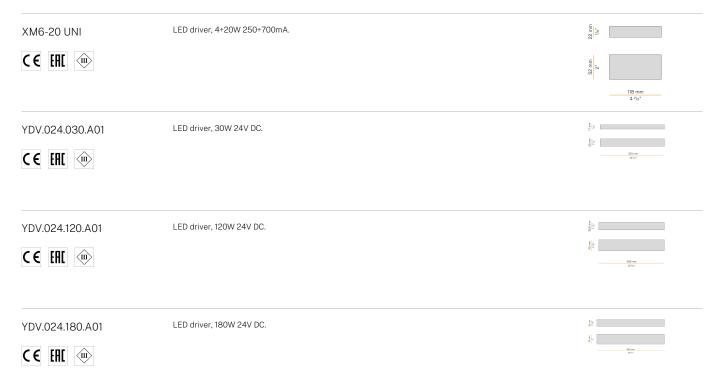

Brooklyn

Accessories / connection

XM2033/34/32/31-S

Power cables.





Brooklyn

Accessories / diffusion

XM2033/34-WHI

White reflector with 1000mm (39,4") lenght to be cut.



CE EHI 🕸

XM2033/34/45/46-1200S

Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.



C € ERI ®

XM2033/34/45/46-600S

Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



C€ [H[ŵ



Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.







XM2033/34/45/46-900S

Brooklyn

Accessories / fixing

XM2033-F

CE EHI 🕸

Drywall fixing bracket for trimless recessed profiles.



XM2033/34-L

Pair of fixing plates for recessed installation in brick wall or concrete.







CE EHI 🕸

XM2033/34/38/39P

Plate for hanging.










Brooklyn

Accessories / junction

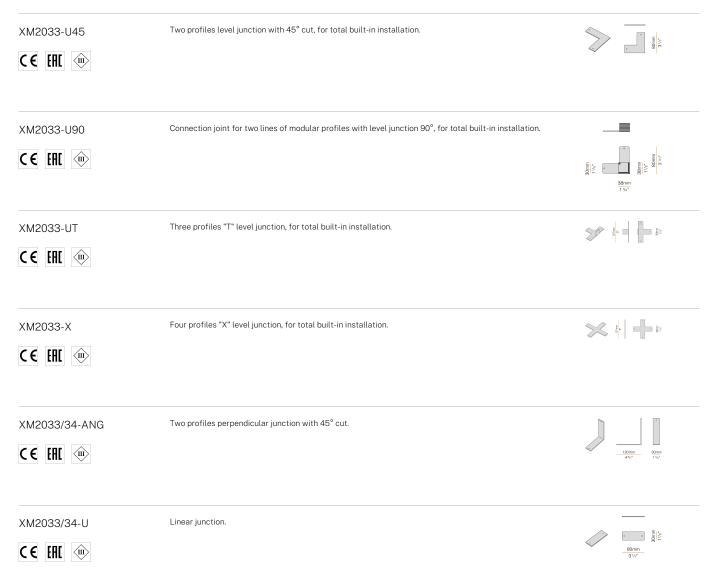

Brooklyn

Accessories / closing

XM2033-T

Pair of end caps with screws for trimless recessed profiles.







C€ EHI ŵ