

## Brooklyn

24V DC  
XG2033-300TRACK

 white/opal screen



### Data sheet

CODE	XG2033-300TRACK
SYSTEM POWER CONSUMPTION	max 24W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	2,21 Kg
PROTECTION DEGREE	IP40 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	6,0 x 6,0 x 314,0 cm
L (mm)	3010
L (in)	118 3/5"
ADVISED BRACKETS	4
HOLE (mm)	3015 x 40
HOLE (in)	118 4/5" x 1 3/8"



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish.


Equipped with disposal screen for smoothing, plastering and painting of the installation surface.

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 3015x40mm (118,7x1,6")


### Technical drawing

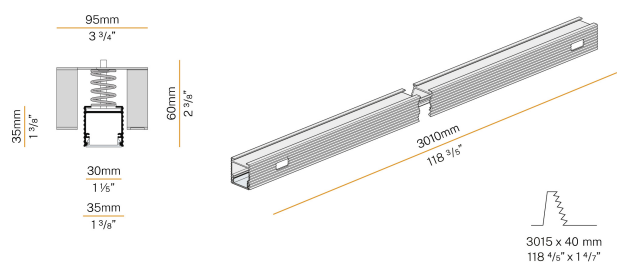

### Application



### Polar diagram

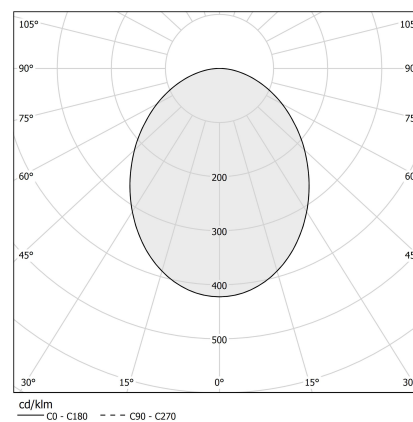

# PANZERI

## Brooklyn

### Accessories / source

---

XM006.012.0410 LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



---

XM006.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



---

YLR005.010.0410 LED STRIP: 5m/5cm 9.6W/m 3000K CRI90 24V 1220lm/m



---

YLR005.010.0510 LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m



---

YLR005.010.0610 LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m



---

YLR006.017.0410 LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m



---

YLR006.017.0510 LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m



---

YLR006.017.0610 LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m




# PANZERI


## Brooklyn

### Accessories / power supply


XM6-20 UNI LED driver, 4\*20W 250=700mA.




YDV.024.030.A01 LED driver, 30W 24V DC.



YDV.024.120.A01 LED driver, 120W 24V DC.



YDV.024.180.A01 LED driver, 180W 24V DC.



# PANZERI

## Brooklyn

### Accessories / connection

---

XM2033/34/32/31-S

Power cables.



# PANZERI

## Brooklyn

### Accessories / diffusion


XM2033/34-WHI

White reflector with 1000mm (39,4") length to be cut.




XM2033/34/45/46-1200S

Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.




XM2033/34/45/46-600S

Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



XM2033/34/45/46-900S

Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.




# PANZERI

## Brooklyn

### Accessories / fixing

XM2033-F

Drywall fixing bracket for trimless recessed profiles.




XM2033/34-L

Pair of fixing plates for recessed installation in brick wall or concrete.



XM2033/34/38/39P

Plate for hanging.




# PANZERI

## Brooklyn

### Accessories / junction


XM2033-U45

Two profiles level junction with 45° cut, for total built-in installation.



XM2033-U90

Connection joint for two lines of modular profiles with level junction 90°, for total built-in installation.



XM2033-UT

Three profiles "T" level junction, for total built-in installation.




XM2033-X

Four profiles "X" level junction, for total built-in installation.




XM2033/34-ANG

Two profiles perpendicular junction with 45° cut.



XM2033/34-U

Linear junction.



# PANZERI

## Brooklyn

### Accessories / closing

---

XM2033-T

Pair of end caps with screws for trimless recessed profiles.

