

Brooklyn Trim

24V DC
XG2034-100TRACK PR

white/prismatic screen




Data sheet

CODE	XG2034-100TRACK PR
SYSTEM POWER CONSUMPTION	max 24W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	anti-glare
BEAM ANGLE	51° / 82°
POWER SUPPLY	24V DC
DRIVER	remote not included
GLARE RATING	UGR < 19
WEIGHT	0,67 Kg
PROTECTION DEGREE	IP40 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	6,0 x 6,0 x 114,0 cm
L (mm)	1010
L (in)	39 4/5"
ADVISED BRACKETS	2
HOLE (mm)	1015 x 40
HOLE (in)	40" x 1 3/8"



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.
Built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.
Micro-prismatic extruded polycarbonate diffuser.
Light modules and driver to be ordered separately.
Fastening, joining and closing accessories to be ordered separately.
Built-in hole dimension: 1015x40mm (40x1,6")

Technical drawing

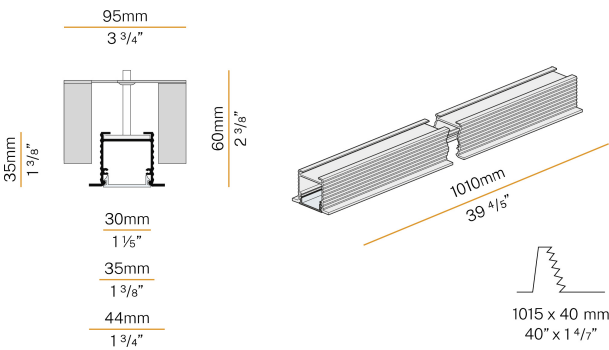

Application



Polar diagram

