#### Manhattan

24V DC

XG2044-100TRACK





#### Data sheet

CODE	XG2044-100TRACK
SYSTEM POWER CONSUMPTION	max 35W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	1,38 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	10,5 x 105,0 x 10,5 cm
L (mm)	920
L (in)	36 1/4"
ADVISED BRACKETS	2
HOLE (mm)	925 x 58
HOLE (in)	36 4/9" x 2 2/7"









Modular profile for ceiling or wall built-in installation for interiors, with indirect light emission.

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded aluminium heat sink.

Extruded polycarbonate diffuser with opaline finish.


Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 925x58mm (36,4x2,3")

#### Technical drawing








#### **Application**



#### Polar diagram



cd/klm C0 - C180 - - - C90 - C270

#### Manhattan

# Accessories / source LED STRIP: 5m/5cm 9.6W/m 3000K CRI90 24V 1220lm/m YLR005.010.0410 CE EHI 🕸 YLR005.010.0510 LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m C€ EHI ŵ YLR005.010.0610 LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m CE EHI LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m YLR006.017.0410 C€ EHI ŵ YLR006.017.0510 LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m CE EHI 🕸 YLR006.017.0610 LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m C € ERI ŵ LED STRIP: 5m /4.2cm 22W/m 3000K CRI90 24V 2700lm/m YLR007.022.0410 C€ EHI ŵ LED STRIP: 5m /4.2cm 22W/m 2700K CRI90 24V 2490lm/m YLR007.022.0510 C € EHI ®


LED STRIP: 5m /4.2cm 22W/m 4000K CRI90 24V 2750lm/m

YLR007.022.0610

C€ [H[ ŵ


#### Manhattan

#### Accessories / power supply

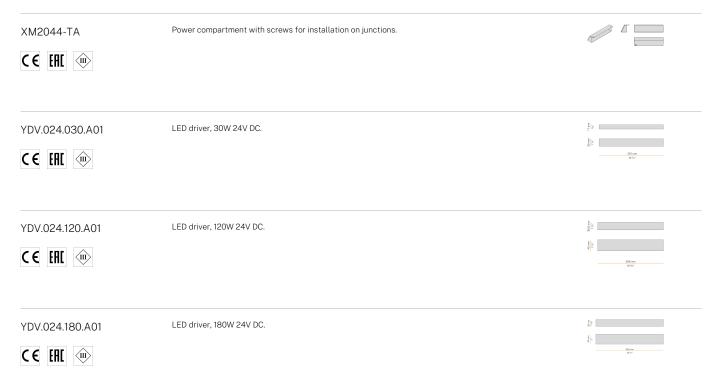

### Manhattan

#### Accessories / fixing

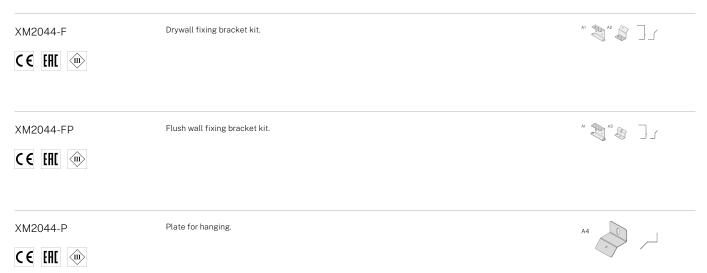

#### Manhattan

#### Accessories / junction

XM2044-ANG 3

Connection joint for two lines of modular profiles with internal perpendicular junction  $90^\circ$ , for total built-in installation.





C€ [HI ⓓ

Connection joint for two lines of modular profiles with external perpendicular junction  $90^{\circ}$ , for total XM2044-ANG 4 built-in installation.







XM2044-U

Linear junction kit.





C € ERI ŵ









XM2044-U901

CE EHI ®

Connection joint for two lines of modular profiles with external level junction  $90^\circ$ , for total built-in installation.







XM2044-U90 2

Connection joint for two lines of modular profiles with internal level junction  $90^\circ$ , for total built-in installation.













### Manhattan

#### Accessories / closing

XM2044-T

Pair of end caps with screws.





