

Manhattan

24V DC
XG2044-200TRACK

● white



Data sheet

CODE	XG2044-200TRACK
SYSTEM POWER CONSUMPTION	max 35W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	2,64 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	10,5 x 205,0 x 10,5 cm
L (mm)	1920
L (in)	75 2/3"
ADVISED BRACKETS	3
HOLE (mm)	1925 x 58
HOLE (in)	75 5/6" x 2 2/7"



Modular profile for ceiling or wall built-in installation for interiors, with indirect light emission.

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded aluminium heat sink.


Extruded polycarbonate diffuser with opaline finish.

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 1925x58mm (75,8x2,3")


Technical drawing

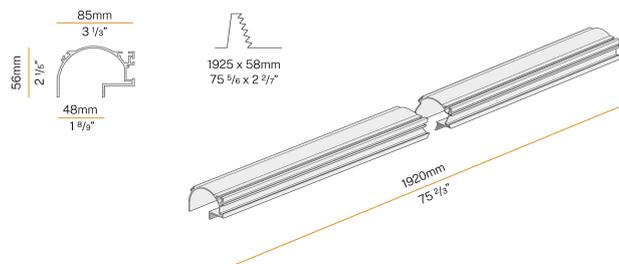

Application



Polar diagram

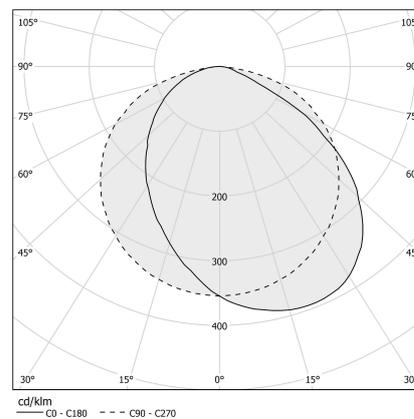

PANZERI

Manhattan

Accessories / source

YLR005.010.0410 LED STRIP: 5m/5cm 9.6W/m 3000K CRI90 24V 1220lm/m



YLR005.010.0510 LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m



YLR005.010.0610 LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m



YLR006.017.0410 LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m



YLR006.017.0510 LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m



YLR006.017.0610 LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m



YLR007.022.0410 LED STRIP: 5m /4.2cm 22W/m 3000K CRI90 24V 2700lm/m



YLR007.022.0510 LED STRIP: 5m /4.2cm 22W/m 2700K CRI90 24V 2490lm/m



YLR007.022.0610 LED STRIP: 5m /4.2cm 22W/m 4000K CRI90 24V 2750lm/m



PANZERI

Manhattan

Accessories / power supply

XM2044-TA

Power compartment with screws for installation on junctions.




YDV.024.030.A01

LED driver, 30W 24V DC.



YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.



PANZERI

Manhattan

Accessories / fixing

XM2044-F

Drywall fixing bracket kit.




XM2044-FP

Flush wall fixing bracket kit.



XM2044-P

Plate for hanging.



PANZERI

Manhattan

Accessories / junction

XM2044-ANG 3

Connection joint for two lines of modular profiles with internal perpendicular junction 90°, for total built-in installation.



XM2044-ANG 4

Connection joint for two lines of modular profiles with external perpendicular junction 90°, for total built-in installation.



XM2044-U

Linear junction kit.



XM2044-U90 1

Connection joint for two lines of modular profiles with external level junction 90°, for total built-in installation.



XM2044-U90 2

Connection joint for two lines of modular profiles with internal level junction 90°, for total built-in installation.



PANZERI

Manhattan

Accessories / closing

XM2044-T

Pair of end caps with screws.

