## Manhattan

24V DC

XG2044-200TRACK





#### Data sheet

CODE	XG2044-200TRACK
SYSTEM POWER CONSUMPTION	max 35W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	2,64 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	10,5 x 205,0 x 10,5 cm
L (mm)	1920
L (in)	75 2/3"
ADVISED BRACKETS	3
HOLE (mm)	1925 x 58
HOLE (in)	75 5/6" x 2 2/7"









Modular profile for ceiling or wall built-in installation for interiors, with indirect light

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded aluminium heat sink.

Extruded polycarbonate diffuser with opaline finish.


Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 1925x58mm (75,8x2,3")

### Technical drawing






### **Application**



#### Polar diagram



### Manhattan

#### Accessories / source

YLR001.022.0110

 $Strip\ LED, 5000mm\ (196,9")\ 160\ LED/m\ 21,6W/m\ 24V\ DC\ 3000K\ Ra>80\ 3020lm/m,\ to\ be\ cut\ each\ 50mm$ 

C€ EHI ŵ



YLR002.017.0410

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 3000K Ra>90 1810lm/m, to be cut each 42mm



YLR002.017.0510

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 2700K Ra>90 1700lm/m, to be cut each 42mm (1,7").



YLR002.017.0610

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 4000K Ra>90 1920lm/m, to be cut each 42mm (1,7").





Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 3000K Ra>90 930lm/m, to be cut each 42mm





YLR003.010.0410



YLR003.010.0510

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 2700K Ra>90 882lm/m, to be cut each 42mm (1,7").







YLR003.010.0610

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 4000K Ra>90 980lm/m, to be cut each 42mm (1,7").



## Manhattan

### Accessories / power supply

XM100/24 DIM  C € EHL	LED driver, 100W 24V DC, DALI/Push DIM dimmable.	
XM150/24 DIM  C € [H] (□)	LED driver, 150W 24V DC, DALI/Push DIM dimmable.	
XM18/24 DIM	LED driver, 18W 24V DC, DALI/Push DIM dimmable.	40 mm 2022 mm 1777 live 1777
XM2044-TA  C € [H] (ii)	Power compartment with screws for installation on junctions.	175 mm 6 176*
XM35/24 DIM	LED driver, 35W 24V DC, DALI/Push DIM dimmable.	dam 1970 mg 19
XM6-20 UNI	LED driver, 4÷20W 250÷700mA.	196 mm 7 204
XM60/24 DIM	LED driver, 60W 24V DC, DALI/Push DIM dimmable.	1118 mm 4 3/15*
CE FAL ®		200 mm
YDV.024.030.A01 ( € [H] (ii)	LED driver, 30W 24V DC.	
YDV.024.120.A01  C € [H] (ii)	LED driver, 120W 24V DC.	## [2]   2

## Manhattan

## Accessories / power supply

YDV.024.180.A01


LED driver, 180W 24V DC.





## Manhattan

### Accessories / fixing

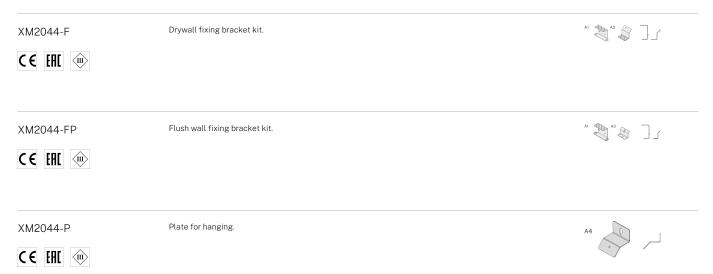

### Manhattan

## Accessories / junction

XM2044-ANG 3

Connection joint for two lines of modular profiles with internal perpendicular junction  $90^\circ$ , for total built-in installation.







C€ [HI ⓓ

XM2044-ANG 4

Connection joint for two lines of modular profiles with external perpendicular junction  $90^{\circ}$ , for total built-in installation.







Linear junction kit.







XM2044-U

Connection joint for two lines of modular profiles with external level junction  $90^\circ$ , for total built-in installation.









XM2044-U901









XM2044-U90 2

Connection joint for two lines of modular profiles with internal level junction  $90^\circ$ , for total built-in installation.













## Manhattan

## Accessories / closing

XM2044-T

Pair of end caps with screws.





