Manhattan

24V DC

XG2044-300TRACK





Data sheet

CODE	XG2044-300TRACK
SYSTEM POWER CONSUMPTION	max 35W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	4,13 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	10,5 x 305,0 x 10,5 cm
L (mm)	2920
L (in)	115"
ADVISED BRACKETS	4
HOLE (mm)	2925 x 58
HOLE (in)	115 1/4" x 2 2/7"









Modular profile for ceiling or wall built-in installation for interiors, with indirect light

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded aluminium heat sink.


Extruded polycarbonate diffuser with opaline finish.

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately. Built-in hole dimension: 2925x58mm (115,2x2,3")

Technical drawing






Application



Polar diagram



cd/klm C0 - C180 - - - C90 - C270

Manhattan

Accessories / source

YLR001.022.0110

 $Strip\ LED, 5000mm\ (196,9")\ 160\ LED/m\ 21,6W/m\ 24V\ DC\ 3000K\ Ra>80\ 3020lm/m,\ to\ be\ cut\ each\ 50mm$

C€ EHI ŵ





YLR002.017.0410

C€ EHI ŵ

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 3000K Ra>90 1810lm/m, to be cut each 42mm

YLR002.017.0510

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 2700K Ra>90 1700lm/m, to be cut each 42mm (1,7").

C€ [H[ŵ

YLR002.017.0610

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 4000K Ra>90 1920lm/m, to be cut each 42mm (1,7").

CE EHI ®

YLR003.010.0410

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 3000K Ra>90 930lm/m, to be cut each 42mm

C € ERI ŵ

YLR003.010.0510

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 2700K Ra>90 882lm/m, to be cut each 42mm (1,7").

C€ [H[ŵ

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 4000K Ra>90 980lm/m, to be cut each 42mm (1,7").

YLR003.010.0610





Manhattan

Accessories / power supply

XM100/24 DIM	LED driver, 100W 24V DC, DALI/Push DIM dimmable.	# 22 # 20
C € ERL ®		39 en. 17%
XM150/24 DIM	LED driver, 150W 24V DC, DALI/Push DIM dimmable.	}-
C E EHL (11)		
XM18/24 DIM	LED driver, 18W 24V DC, DALI/Push DIM dimmable.	39.2 mm 17.4.**
C € EHL ®		E
XM2044-TA	Power compartment with screws for installation on junctions.	
CE FILL (m)		
XM35/24 DIM	LED driver, 35W 24V DC, DALI/Push DIM dimmable.	1 W 1 M
CE FILL (III)		
XM6-20 UNI	LED driver, 4÷20W 250÷700mA.	22 mm
CE FILL (m)		E & 118 mm 4 2/p*
XM60/24 DIM	LED driver, 60W 24V DC, DALI/Push DIM dimmable.	28.5 mm 5.7 mm 7.7 mm 7
CE FILL (III)		225 mm 0 99°
YDV.024.030.A01	LED driver, 30W 24V DC.	
CE EHL (III)		Blan.
YDV.024.120.A01	LED driver, 120W 24V DC.	ã≥
CE ENL (III)		

Manhattan

Accessories / power supply

YDV.024.180.A01


LED driver, 180W 24V DC.





Manhattan

Accessories / fixing

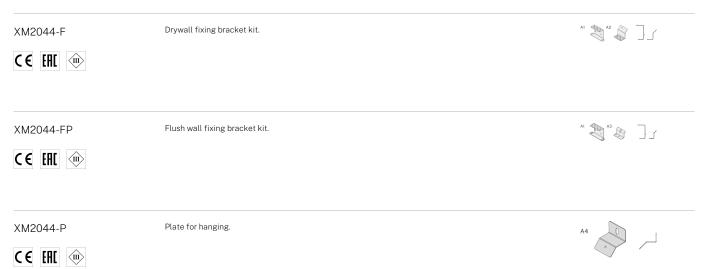

Manhattan

Accessories / junction

Connection joint for two lines of modular profiles with internal perpendicular junction 90° , for total XM2044-ANG 3 built-in installation. C€ [HI ⓓ Connection joint for two lines of modular profiles with external perpendicular junction 90° , for total XM2044-ANG 4 念 砂 出 止 built-in installation. C€ EHI ŵ XM2044-U Linear junction kit. CE EHI Connection joint for two lines of modular profiles with external level junction 90° , for total built-in installation. XM2044-U901 CE EHI ®



Connection joint for two lines of modular profiles with internal level junction 90° , for total built-in installation.







Manhattan

Accessories / closing

XM2044-T

Pair of end caps with screws.





