Manhattan

24V DC

XG2044-50TRACK





Data sheet

CODE	XG2044-50TRACK
SYSTEM POWER CONSUMPTION	max 35W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	0,69 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	10,5 x 54,0 x 10,5 cm
L (mm)	420
L (in)	16 5/9"
ADVISED BRACKETS	2
HOLE (mm)	425 x 58
HOLE (in)	16 3/4" x 2 2/7"









Modular profile for ceiling or wall built-in installation for interiors, with indirect light

Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.

Extruded aluminium heat sink.

Extruded polycarbonate diffuser with opaline finish.


Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.

Built-in hole dimension: 425x58mm (16,7x2,3")

Technical drawing








Application



Polar diagram



cd/klm C0 - C180 - - - C90 - C270

Manhattan

Mannattan		
Accessories / source		
YLR005.010.0410	LED STRIP: 5m/5cm 9.6W/m 3000K CRI90 24V 1220lm/m	
CE ERL (11)		
YLR005.010.0510	LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m	
CE EHI (II)		
YLR005.010.0610	LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m	
CE EMI ®		
YLR006.017.0410	LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m	
CE EHL (ii)		
YLR006.017.0510	LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m	
C€ EHI ®		
YLR006.017.0610	LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m	
CE EHI (III)		
YLR007.022.0410	LED STRIP: 5m /4.2cm 22W/m 3000K CRI90 24V 2700lm/m	
CE EHI (III)		
YLR007.022.0510	LED STRIP: 5m /4.2cm 22W/m 2700K CRI90 24V 2490lm/m	
CE ENI w		

LED STRIP: 5m /4.2cm 22W/m 4000K CRI90 24V 2750lm/m


Panzeri.it - 07/11/2025 - Manhattan - XG2044-50TRACK

YLR007.022.0610

C€ [FRE 🐵


Manhattan

Accessories / power supply

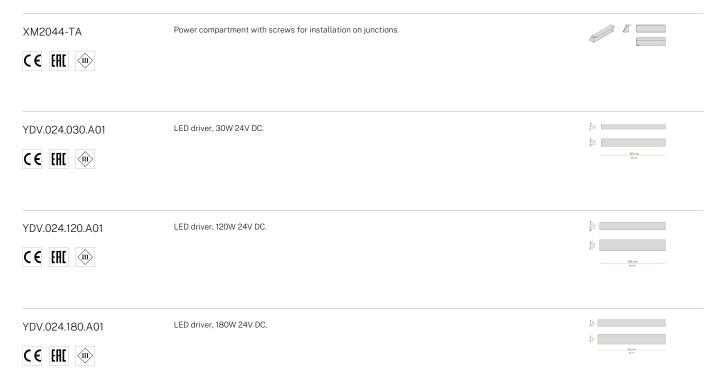

Manhattan

Accessories / fixing

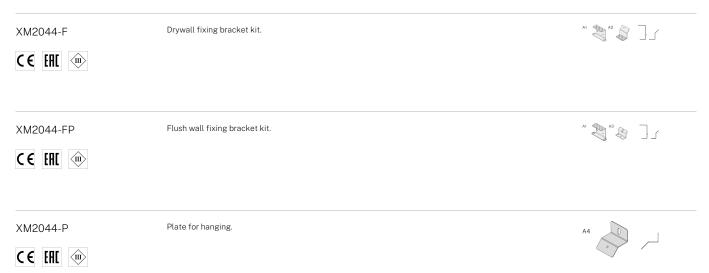

Manhattan

Accessories / junction

XM2044-ANG 3

Connection joint for two lines of modular profiles with internal perpendicular junction 90° , for total built-in installation.







XM2044-ANG 4

C€ [HI ⓓ

Connection joint for two lines of modular profiles with external perpendicular junction 90° , for total built-in installation.













XM2044-U

Linear junction kit.



XM2044-U901

Connection joint for two lines of modular profiles with external level junction 90° , for total built-in installation.







CE EHI ®









XM2044-U90 2

Connection joint for two lines of modular profiles with internal level junction 90° , for total built-in installation.













Manhattan

Accessories / closing

XM2044-T

Pair of end caps with screws.





