

PANZERI

Corner

24V DC
XG2045-100TRACK

white



Data sheet

| | |
|--------------------------|----------------------|
| CODE | XG2045-100TRACK |
| SYSTEM POWER CONSUMPTION | max 24W/m |
| LIGHT SOURCE | LED |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 24V DC |
| DRIVER | remote not included |
| GLARE RATING | UGR < 19 |
| WEIGHT | 0,78 Kg |
| PROTECTION DEGREE | IP40 IP20 |
| PACKING DIMENSIONS | 8,0 x 8,0 x 114,0 cm |
| L (mm) | 1010 |
| L (in) | 39 4/5" |



Modular profile for ceiling or wall perimeter installation for interiors, with direct light emission.


Hidden structure for plasterboard panels, in extruded aluminium in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish.

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.


Technical drawing

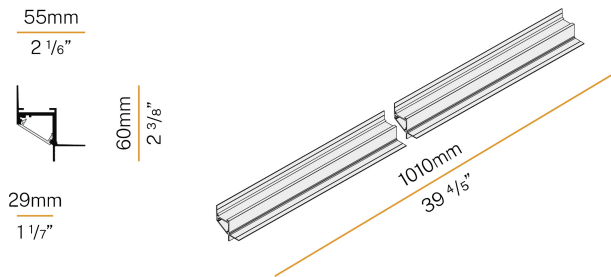

Application



Polar diagram

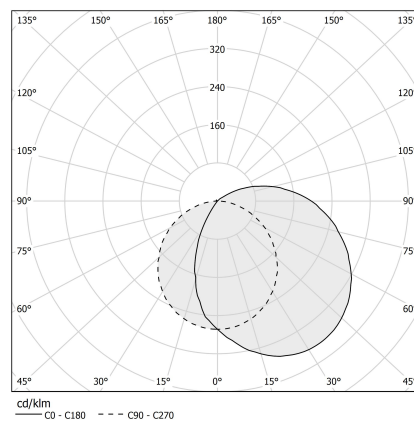

PANZERI

Corner

Accessories / source

XM006.012.0410

LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



XM006.050.0410

LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



YLR001.022.0110

Strip LED, 5000mm (196,9") 160 LED/m 21,6W/m 24V DC 3000K Ra>80 3020lm/m, to be cut each 50mm (2").



YLR002.017.0410

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 3000K Ra>90 1810lm/m, to be cut each 42mm (1,7").



YLR002.017.0610

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 4000K Ra>90 1920lm/m, to be cut each 42mm (1,7").



YLR003.010.0410

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 3000K Ra>90 930lm/m, to be cut each 42mm (1,7").



YLR003.010.0510

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 2700K Ra>90 882lm/m, to be cut each 42mm (1,7").



YLR003.010.0610

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 4000K Ra>90 980lm/m, to be cut each 42mm (1,7").




PANZERI

Corner

Accessories / power supply


XM100/24 DIM

LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM150/24 DIM

LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM

LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM35/24 DIM

LED driver, 35W 24V DC, DALI/Push DIM dimmable.




XM6-20 UNI

LED driver, 4x20W 250=700mA.



XM60/24 DIM

LED driver, 60W 24V DC, DALI/Push DIM dimmable.




YDV.024.030.A01

LED driver, 30W 24V DC.




YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.




PANZERI


Corner

Accessories / diffusion


XM2033/34/45/46-1200S Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.



XM2033/34/45/46-600S Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



XM2033/34/45/46-900S Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.




PANZERI

Corner

Accessories / junction


XM2045-ANG 3

Connection joint for two lines of modular profiles with internal perpendicular junction 90°, for perimetral installation.




XM2045-ANG 4

Connection joint for two lines of modular profiles with external perpendicular junction 90°, for perimetral installation.




XM2045-U

Linear junction.




XM2045-U90 1

Connection joint for two lines of modular profiles with internal level junction 90°, for perimetral installation.



XM2045-U90 2

Connection joint for two lines of modular profiles with external level junction 90°, for perimetral installation.



PANZERI

Corner

Accessories / closing

XM2045-T

Pair of end caps with screws.

