

# PANZERI

## Corner

24V DC  
XG2045-200TRACK

white



### Data sheet

CODE	XG2045-200TRACK
SYSTEM POWER CONSUMPTION	max 24W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
GLARE RATING	UGR < 19
WEIGHT	1,45 Kg
PROTECTION DEGREE	IP40 IP20
PACKING DIMENSIONS	8,0 x 8,0 x 214,0 cm
L (mm)	2010
L (in)	79 1/5"



Modular profile for ceiling or wall perimeter installation for interiors, with direct light emission.


Hidden structure for plasterboard panels, in extruded aluminium in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish.

Light modules and driver to be ordered separately.

Fastening, joining and closing accessories to be ordered separately.


### Technical drawing

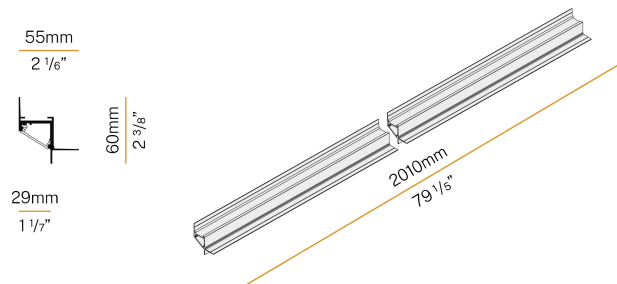

### Application



### Polar diagram

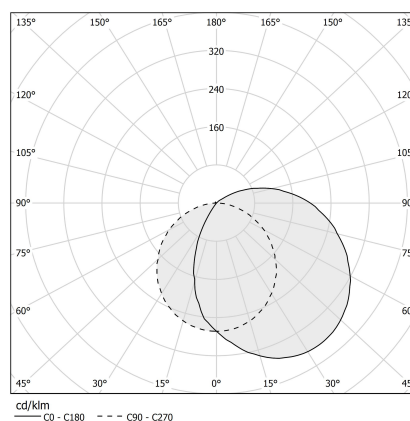

# PANZERI

## Corner

### Accessories / source

---

XM006.012.0410 LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



---

XM006.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



---

YLR005.010.0410 LED STRIP: 5m/5cm 9.6W/m 3000K CRI90 24V 1220lm/m



---

YLR005.010.0510 LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m



---

YLR005.010.0610 LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m



---

YLR006.017.0410 LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m



---

YLR006.017.0510 LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m



---

YLR006.017.0610 LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m



---

YLR007.022.0410 LED STRIP: 5m /4.2cm 22W/m 3000K CRI90 24V 2700lm/m



# PANZERI

## Corner

### Accessories / source

---

YLR007.022.0510

LED STRIP: 5m /4.2cm 22W/m 2700K CRI90 24V 2490lm/m



---

YLR007.022.0610

LED STRIP: 5m /4.2cm 22W/m 4000K CRI90 24V 2750lm/m




# PANZERI

## Corner

### Accessories / power supply


YDV.024.030.A01

LED driver, 30W 24V DC.



YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.




# PANZERI


## Corner

### Accessories / diffusion


XM2033/34/45/46-1200S Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.



XM2033/34/45/46-600S Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



XM2033/34/45/46-900S Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.




# PANZERI

## Corner

### Accessories / junction


XM2045-ANG 3

Connection joint for two lines of modular profiles with internal perpendicular junction 90°, for perimetral installation.




XM2045-ANG 4

Connection joint for two lines of modular profiles with external perpendicular junction 90°, for perimetral installation.




XM2045-U

Linear junction.




XM2045-U90 1

Connection joint for two lines of modular profiles with internal level junction 90°, for perimetral installation.



XM2045-U90 2

Connection joint for two lines of modular profiles with external level junction 90°, for perimetral installation.



# PANZERI

## Corner

### Accessories / closing

---

XM2045-T

Pair of end caps with screws.

