

PANZERI

Brooklyn Round

24V DC
XG23101.090.0099

● white




Data sheet

CODE	XG23101.090.0099
SYSTEM POWER CONSUMPTION	max 13,2W
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	0,70 Kg
PROTECTION DEGREE	IP40 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	7,0 x 72,0 x 28,0 cm
DEGREES	90°
Ø (mm)	1000
Ø (in)	39 2/5"
H (mm)	35
H (in)	1 3/8"
HOLE (mm)	Ø ext. 1005 / int. 926
HOLE (in)	Ø ext. 39 3/5" / int. 36 1/2"



Technical drawing

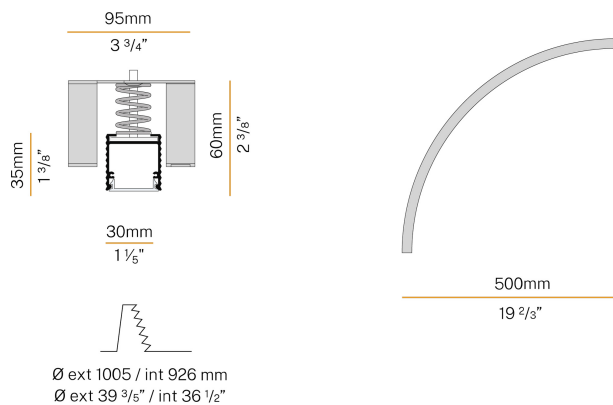

Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.

Total built-in structure in plasterboard, in bended extruded aluminium in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish.

Equipped with disposal screen for smoothing, plastering and painting of the installation surface.

Equipped with wing nuts.

Light modules and driver to be ordered separately.

Joining and closing accessories to be ordered separately.

Built-in hole dimension: external Ø 1005mm (39,6") / internal Ø 926mm (36,5")

Application



Polar diagram

