

# PANZERI

## Brooklyn Round

24V DC

XG23101.180.0099

● white




### Data sheet

|                            |                               |
|----------------------------|-------------------------------|
| CODE                       | XG23101.180.0099              |
| SYSTEM POWER CONSUMPTION   | max 26,4W                     |
| LIGHT SOURCE               | LED                           |
| LIGHT DISTRIBUTION         | diffused                      |
| POWER SUPPLY               | 24V DC                        |
| DRIVER                     | remote not included           |
| WEIGHT                     | 1,14 Kg                       |
| PROTECTION DEGREE          | IP40 IP20                     |
| SHOCK RESISTANCE RATING    | IK08                          |
| GLOW WIRE TEST PERFORMANCE | 850°                          |
| PACKING DIMENSIONS         | 13,0 x 108,0 x 57,0 cm        |
| DEGREES                    | 180°                          |
| Ø (mm)                     | 1000                          |
| Ø (in)                     | 39 2/5"                       |
| H (mm)                     | 35                            |
| H (in)                     | 1 3/8"                        |
| HOLE (mm)                  | Ø ext. 1005 / int. 926        |
| HOLE (in)                  | Ø ext. 39 3/5" / int. 36 1/2" |



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.  
Total built-in structure in plasterboard, in bended extruded aluminium in RAL 9003 white powder paint.  
Extruded polycarbonate diffuser with opaline finish.  
Equipped with disposal screen for smoothing, plastering and painting of the installation surface.  
Equipped with wing nuts.  
Light modules and driver to be ordered separately.  
Joining and closing accessories to be ordered separately.  
Built-in hole dimension: external Ø 1005mm (39,6") / internal Ø 926mm (36,5")

### Technical drawing

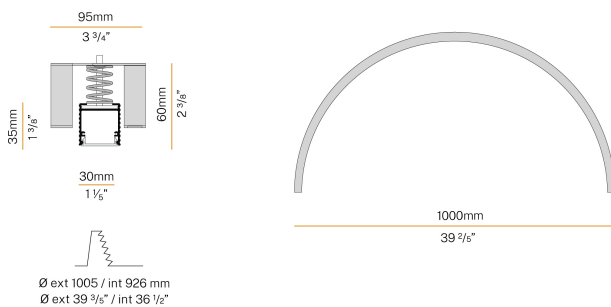

### Application



### Polar diagram

