

Nolita Trim

220-240V AC dimmable (DALI/Push DIM)  
XG23901.060.0402




Data sheet

|                            |                          |
|----------------------------|--------------------------|
| CODE                       | XG23901.060.0402         |
| SYSTEM POWER CONSUMPTION   | 24,5W                    |
| EFFICACY                   | 54lm/W                   |
| LIGHT SOURCE               | LED                      |
| COLOUR TEMPERATURE         | 3000K Ra>90              |
| LIGHT DISTRIBUTION         | diffused                 |
| POWER SUPPLY               | 220-240V AC              |
| FREQUENCY                  | 50/60Hz                  |
| ELECTRICAL CONFIGURATION   | dimmable (DALI/Push DIM) |
| DRIVER                     | integrated included      |
| NOMINAL LUMINOUS FLUX      | 2608lm                   |
| LUMEN OUTPUT               | 1296lm                   |
| EFFICIENCY                 | 49.7%                    |
| WEIGHT                     | 1,82 Kg                  |
| PROTECTION DEGREE          | IP40 IP20                |
| SHOCK RESISTANCE RATING    | IK08                     |
| GLOW WIRE TEST PERFORMANCE | 850°                     |
| PACKING DIMENSIONS         | 14,0 x 65,0 x 14,0 cm    |
| L (mm)                     | 591                      |
| L (in)                     | 23 2/7"                  |
| ADVISED BRACKETS           | 2                        |
| HOLE (mm)                  | 596 x 75                 |
| HOLE (in)                  | 23 1/2" x 3"             |



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.  
Built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.  
Reflector retaining spring clips in stainless steel.  
Aluminium reflector in RAL 9003 white polyacrylic paint.  
Equipped with light modules and dimmable driver.  
Extruded polycarbonate diffuser with opaline finish or micro-prismatic to be ordered separately.  
Fastening, joining and closing accessories to be ordered separately.  
Built-in hole dimension: 596x75mm (23,5x3")

Technical drawing

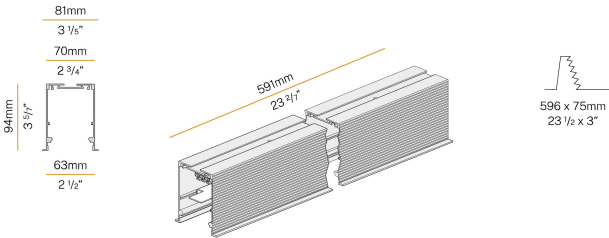

Application



Polar diagram

