

PANZERI

Bronx

24V DC

XG24702.300.0099

● black




Data sheet

CODE	XG24702.300.0099
SYSTEM POWER CONSUMPTION	17,2W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	2,93 Kg
PROTECTION DEGREE	IP40 IP20
PACKING DIMENSIONS	8,0 x 314,0 x 8,0 cm
L (mm)	3010
L (in)	118 3/5"
ADVISED BRACKETS	4
HOLE (mm)	3015 x 50
HOLE (in)	118 4/5" x 2"



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.
Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white or black powder paint.
Recessed extruded polycarbonate diffuser with opaline finish.
Light modules and driver to be ordered separately.
Fastening, joining and closing accessories to be ordered separately.
Built-in hole dimension: 3015x50mm (118,7x2")


Technical drawing

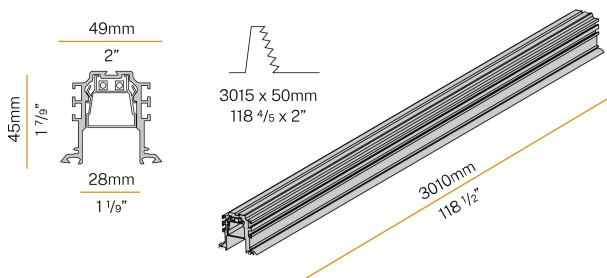

Application



Polar diagram

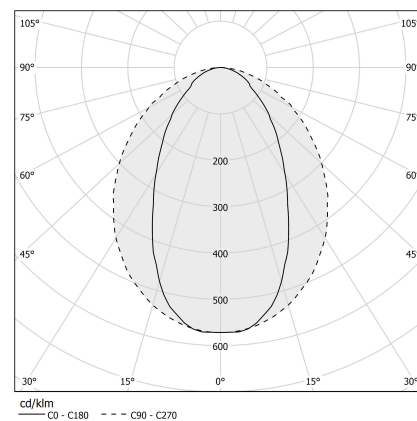

PANZERI

Bronx

Accessories / source

XM005.012.0410 LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



XM005.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



PANZERI

Bronx

Accessories / power supply

XM100/24 DIM

LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM150/24 DIM

LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM

LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM35/24 DIM

LED driver, 35W 24V DC, DALI/Push DIM dimmable.




XM6-20 UNI

LED driver, 4x20W 250=700mA.



XM60/24 DIM

LED driver, 60W 24V DC, DALI/Push DIM dimmable.




YDV.024.030.A01

LED driver, 30W 24V DC.



YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.



PANZERI

Bronx

Accessories / connection

XM2033/34/32/31-S

Power cables.




PANZERI

Bronx

Accessories / fixing

XM24700.201.0099

Drywall fixing bracket kit.



PANZERI


Bronx

Accessories / junction

XM24700.301.0099 Linear junction kit.



XM24702.302.0099 Connection joint for two lines of modular profiles with level junction 90°, for total built-in installation.



PANZERI

Bronx

Accessories / closing

XM24702.202.0099

Pair of end caps with screws.

