

Harlem

24V DC
XG25101.200.0099




Data sheet

CODE	XG25101.200.0099
SYSTEM POWER CONSUMPTION	17W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	0,91 Kg
PROTECTION DEGREE	IP40 IP20
PACKING DIMENSIONS	6,0 x 6,0 x 214,0 cm
L (mm)	2010
L (in)	79 1/5"
HOLE (mm)	2015 x 55
HOLE (in)	79 2/5" x 2 1/6"



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.
Total built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.
Extruded polycarbonate diffuser with opaline finish.
Equipped with disposal screen for smoothing, plastering and painting of the installation surface.
Light modules and driver to be ordered separately.
Joining and closing accessories to be ordered separately.
Built-in hole dimension: 2015x55mm (79,3x2,2")


Technical drawing



Application



Polar diagram

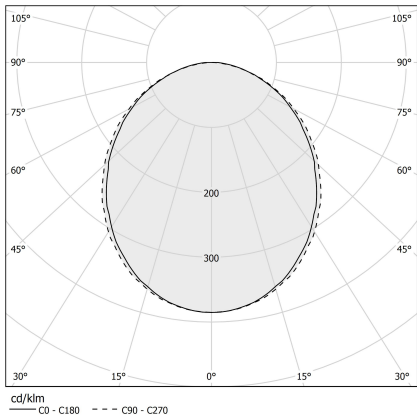

Harlem

Accessories / source

YLR002.017.0410

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 3000K Ra>90 1810lm/m, to be cut each 42mm (1,7").



YLR002.017.0510

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 2700K Ra>90 1700lm/m, to be cut each 42mm (1,7").



YLR002.017.0610

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 4000K Ra>90 1920lm/m, to be cut each 42mm (1,7").



YLR003.010.0410

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 3000K Ra>90 930lm/m, to be cut each 42mm (1,7").



YLR003.010.0510

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 2700K Ra>90 882lm/m, to be cut each 42mm (1,7").



YLR003.010.0610

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 4000K Ra>90 980lm/m, to be cut each 42mm (1,7").



Accessories / power supply


XM100/24 DIM LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM150/24 DIM LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM35/24 DIM LED driver, 35W 24V DC, DALI/Push DIM dimmable.



XM6-20 UNI LED driver, 4÷20W 250÷700mA.




XM60/24 DIM LED driver, 60W 24V DC, DALI/Push DIM dimmable.




YDV.024.030.A01 LED driver, 30W 24V DC.



YDV.024.120.A01 LED driver, 120W 24V DC.



YDV.024.180.A01 LED driver, 180W 24V DC.




PANZERI

Harlem

Accessories / junction

XM27000.301.0099

Linear junction kit.



PANZERI

Harlem

Accessories / closing

YTC25101.K02

Pair of end caps with screws.

