

Kips Round

24V DC
XG27101.100.0099

white




Data sheet

CODE	XG27101.100.0099
SYSTEM POWER CONSUMPTION	max 4,2W
LIGHT SOURCE	LED
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	0,09 Kg
PROTECTION DEGREE	IP40 IP20
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm
DEGREES	45°
Ø (mm)	1033
Ø (in)	40 5/7"
H (mm)	23,2
H (in)	1"
ADVISED BRACKETS	2
HOLE (mm)	Ø ext. 1029 / int. 1008
HOLE (in)	Ø ext. 40 1/2" / int. 39 5/7"



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.
Built-in structure in plasterboard, in bended extruded aluminium in RAL 9003 white powder paint.
Light modules and driver to be ordered separately.
Fastening, joining and closing accessories to be ordered separately.
Built-in hole dimension: external Ø 1029mm (40,5") / internal Ø 1008mm (39,7")


Technical drawing

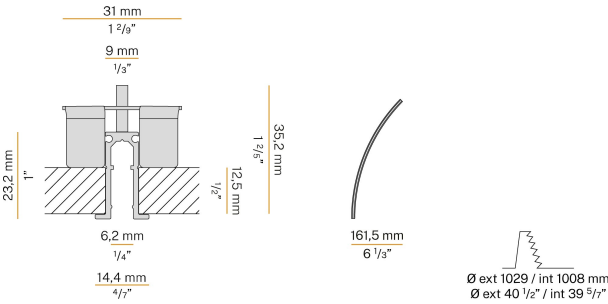

Application



Polar diagram

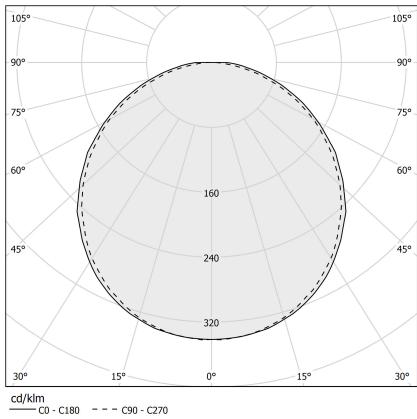

Kips Round

Accessories / source

YLR101.011.0110

Strip LED, 1000mm (39,4") 10,6W/m 24V DC 3000K Ra>80 401lm/m, to be cut each 50mm (2").



YLR102.011.0110

Strip LED, 5000mm (196,9") 10,6W/m 24V DC 3000K Ra>80 401lm/m, to be cut each 50mm (2").




PANZERI

Kips Round

Accessories / power supply


XM6-20 UNI

LED driver, 4×20W 250±700mA.




YDV.024.030.A01

LED driver, 30W 24V DC.




YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.




PANZERI

Kips Round

Accessories / connection

XM27000.401.0099


Faston kit for electrical connection (10 pieces).



Accessories / fixing

XM27000.201.0099

Drywall fixing bracket.




PANZERI

Kips Round

Accessories / junction

XM27000.301.0099

Linear junction kit.



PANZERI

Kips Round

Accessories / closing

XM27001.202.0099

Pair of end caps with screws.

