

# PANZERI

## East


220-240V AC  
XGQ0998-GL

 plaster




### Data sheet

CODE	XGQ0998-GL
SYSTEM POWER CONSUMPTION	max 50W
LIGHT SOURCE	LED retrofit / halogen
LIGHT SOURCE KIT	not included
COMPATIBLE SOURCES	max 50W GU10
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
WEIGHT	0,33 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	7,5 x 10,0 x 10,0 cm



Lighting fixture for ceiling built-in installation for interiors, with direct light emission.  
Total built-in plaster structure for masonry or plasterboard.  
Light source retaining spring clip in stainless steel.  
Flat sandblasted glass diffuser.  
Fixing brackets in micro-perforated sheet metal.  
Recessed housing for masonry in galvanized sheet metal to be ordered separately.  
Built-in hole dimension: 102x102mm (4x4")

### Technical drawing

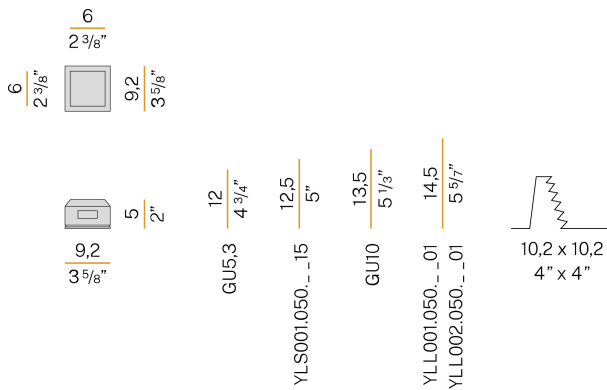

### Application



# PANZERI


## East

### Accessories / source

---

YLL001.050.2201

PAR16 LED lamp GU10 7,5W 220-240V AC 3000K Ra>80 608lm 60°, not dimmable, white colour.



---

YLL002.050.2201

PAR16 LED lamp GU10 7,5W 220-240V AC 3000K Ra>80 608lm 60°, not dimmable, black colour.



---

YLS001.050.1715

LED lamp 8,5W 250mA 35V 2700K Ra>90 806lm 35°.



---

YLS001.050.2515

LED lamp 8,5W 250mA 35V 3000K Ra>90 854lm 35°.



---

YLS001.050.2915

LED lamp 8,5W 250mA 35V 4000K Ra>90 1053lm 35°.





# PANZERI

## East

### Accessories / power supply


XM6-15 UNI

LED driver, 2,5÷15W 60÷360mA.




XM6-20 D/P MULTI

LED driver, 9,2÷28W 200÷900mA, 1-10V/DALI/Push DIM dimmable.



XM6-25 D/P MULTI

LED driver, 11÷25,6W 200÷900mA, DALI/Push DIM dimmable.



# PANZERI

East

## Accessories / fixing

---

XM0998-GL

Galvanized sheet housing to be recessed in brick wall or concrete.

