

PANZERI

East


220-240V AC
XGQ0998-GL

plaster




Data sheet

CODE	XGQ0998-GL
SYSTEM POWER CONSUMPTION	max 50W
LIGHT SOURCE	LED retrofit / halogen
LIGHT SOURCE KIT	not included
COMPATIBLE SOURCES	max 50W GU10
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
WEIGHT	0,33 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	7,5 x 10,0 x 10,0 cm



Lighting fixture for ceiling built-in installation for interiors, with direct light emission.
Total built-in plaster structure for masonry or plasterboard.
Light source retaining spring clip in stainless steel.
Flat sandblasted glass diffuser.
Fixing brackets in micro-perforated sheet metal.
Recessed housing for masonry in galvanized sheet metal to be ordered separately.
Built-in hole dimension: 102x102mm (4x4")

Technical drawing

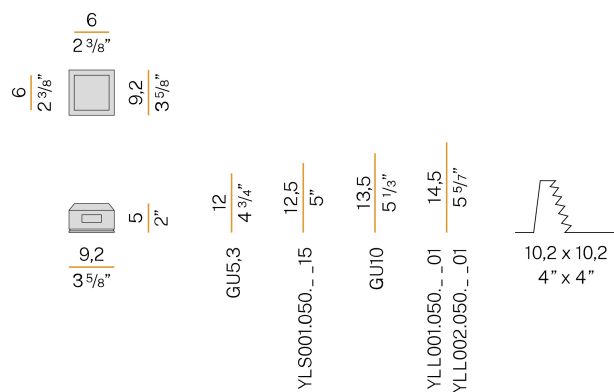

Application

