

PANZERI

East


220-240V AC
XGQ1004-GL

plaster




Data sheet

| | |
|--------------------------|------------------------|
| CODE | XGQ1004-GL |
| SYSTEM POWER CONSUMPTION | max 50W |
| LIGHT SOURCE | LED retrofit / halogen |
| LIGHT SOURCE KIT | not included |
| COMPATIBLE SOURCES | max 50W GU10 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| WEIGHT | 0,56 Kg |
| PROTECTION DEGREE | IP20 |
| PACKING DIMENSIONS | 17,0 x 20,0 x 12,0 cm |



Lighting fixture for ceiling built-in installation for interiors, with direct light emission.
Total built-in plaster structure for masonry or plasterboard.
Light source retaining spring clip in stainless steel.
Flat frosted glass diffuser.
Fixing brackets in micro-perforated sheet metal.
Recessed housing for masonry in galvanized sheet metal to be ordered separately.
Built-in hole dimension: 125x125mm (4,9x4,9")

Technical drawing

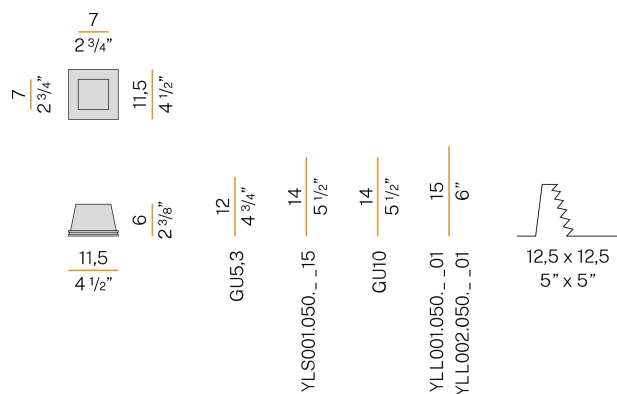

Application



PANZERI

East

Accessories / source

YLL001.050.2201 PAR16 LED lamp GU10 7,5W 220-240V AC 3000K Ra>80 608lm 60°, not dimmable, white colour.



YLL002.050.2201 PAR16 LED lamp GU10 7,5W 220-240V AC 3000K Ra>80 608lm 60°, not dimmable, black colour.



YLS001.050.1715 LED lamp 8,5W 250mA 35V 2700K Ra>90 806lm 35°.



YLS001.050.2515 LED lamp 8,5W 250mA 35V 3000K Ra>90 854lm 35°.



YLS001.050.2915 LED lamp 8,5W 250mA 35V 4000K Ra>90 1053lm 35°.




PANZERI

East

Accessories / power supply


XM6-15 UNI

LED driver, 2,5÷15W 60÷360mA.




XM6-20 D/P MULTI

LED driver, 9,2÷28W 200÷900mA, 1-10V/DALI/Push DIM dimmable.



XM6-25 D/P MULTI

LED driver, 11÷25,6W 200÷900mA, DALI/Push DIM dimmable.



PANZERI

East

Accessories / fixing

XM1004/1004-GL/1030 Galvanized sheet housing to be recessed in brick wall or concrete.

