

PANZERI

Click Clack

220-240V AC

XGR1212

plaster

DIRECT
LIGHT

Data sheet


CODE	XGR1212
SYSTEM POWER CONSUMPTION	max 6W
EFFICACY	42.67lm/W
LIGHT SOURCE	LED retrofit
LIGHT SOURCE KIT	not included
COMPATIBLE SOURCES	LED retrofit bulb 4W GU10 Ø 35mm 3000K Ra80 330lm (no dimming)
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
NOMINAL LUMINOUS FLUX	330lm
LUMEN OUTPUT	256lm
EFFICIENCY	77.6%
WEIGHT	0,45 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM -6
PACKING DIMENSIONS	13,0 x 24,0 x 12,0 cm



Lighting fixture for ceiling built-in installation for interiors, with direct light emission. Total built-in plaster structure for plasterboard. Bulb push and pull mechanism. Micro-perforated sheet metal brackets for plasterboard fixing. Built-in hole dimension: Ø 100mm (Ø 3,9")



Technical drawing

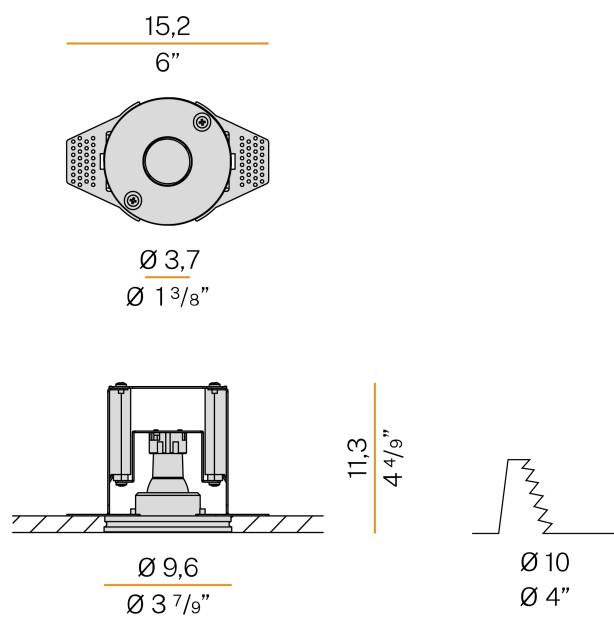

Application



PANZERI

Click Clack

Accessories / source

XM5/GU10-35

MR11 Ø 35mm LED lamp GU10 4W 110-240V AC 3000K Ra>80 330lm 38°, not dimmable.

