

PANZERI

Queens 25

220-240V AC ON-OFF
XM751-30-02-4K




Data sheet

CODE	XM751-30-02-4K
SYSTEM POWER CONSUMPTION	30W
EFFICACY	87.23lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	4000K Ra>85
LIGHT DISTRIBUTION	adjustable
BEAM ANGLE	29°
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3590lm
LUMEN OUTPUT	2617lm
EFFICIENCY	72.9%
GLARE RATING	UGR < 16
WEIGHT	1,04 Kg
PROTECTION DEGREE	IP20
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	11,0 x 11,7 x 29,2 cm



Lighting fixture for electrified track for interiors, with swivelling light beam.
Die-cast aluminium joint with powder paint.
Die-cast aluminium cap with powder paint.
Die-cast aluminium structure rotating on two axes in white or black powder paint.
Reflector in thermoplastic material with chrome plated finish.
Equipped with electric and mechanical adapter for three-phase electrified tracks.


Technical drawing

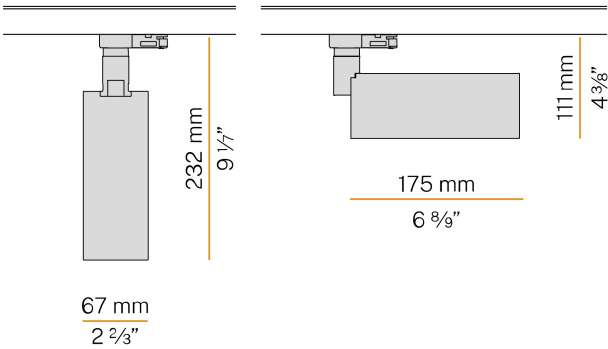

Application



Polar diagram

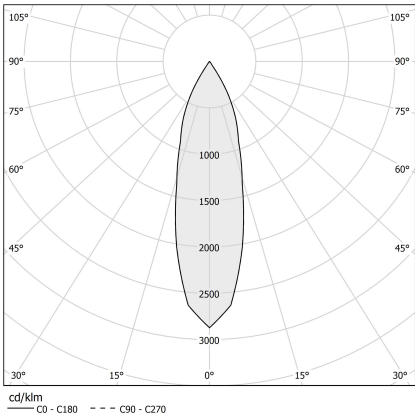


PANZERI

Queens 25

Accessories / diffusion


XMR5

Spot optic.




XMR7

Wide flood optic.



XMR8

Wide flood optic.




Accessories / electrified tracks

XM7502-100




Three-phase electrified track for suspended or ceiling installation for interiors. Structure in anodized extruded aluminium or with white or black powder paint. Copper conductors housed inside extruded section bars in PVC with high isolation resistance. 230-250V AC line voltage or 380-440V AC industrial line voltage power supply. 16A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 1m (39,4")



XM7502-200




Three-phase electrified track for suspended or ceiling installation for interiors. Structure in anodized extruded aluminium or with white or black powder paint. Copper conductors housed inside extruded section bars in PVC with high isolation resistance. 230-250V AC line voltage or 380-440V AC industrial line voltage power supply. 16A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 2m (78,7")



XM7502-300



Three-phase electrified track for suspended or ceiling installation for interiors. Structure in anodized extruded aluminium or with white or black powder paint. Copper conductors housed inside extruded section bars in PVC with high isolation resistance. 230-250V AC line voltage or 380-440V AC industrial line voltage power supply. 16A total electrical load. Fastening, joining and closing accessories to be ordered separately. Length: 3m (118,1")




Queens 25

Accessories / electrified tracks / adapters

XM7502 Electro/mechanical adapter 6A, mechanical load 5kg, for three-phase electrified track.



XM76B02 Mechanical adapter with automatic locking for three-phase electrified track.




Queens 25

Accessories / electrified tracks / power supply and closing


XM76ADX02

Right live-end for three-phase electrified track.



XM76ASX02


Left live-end for three-phase electrified track.



Accessories / electrified tracks / power supply and junction

XM76A02


Central connector and straight joint for three-phase electrified track.




Queens 25

Accessories / electrified tracks / closing

XM76C02 Cover 1000mm (39,4") long for three-phase electrified track.




XM76E02 End cap for three-phase electrified track.



Accessories / electrified tracks / fixing


XM76K

Ceiling kit for three-phase electrified track.



XM76S02


Suspension kit with 2m (78,7") long steel wire and plate for three-phase electrified track.



Accessories / electrified tracks / junction


XM76F02

Flexible joint for three-phase electrified track.




XM76LE02

External "L" joint for three-phase electrified track.



XM76LI02

Internal "L" joint for three-phase electrified track.




XM76M02

Mobile joint for three-phase electrified track.




XM76Q02

Electrical straight joint with stop for three-phase electrified track.




XM76TDX02

Right "T" joint for three-phase electrified track.




XM76TSX02

Left "T" joint for three-phase electrified track.



XM76U02

Mechanical straight joint for three-phase electrified track.



XM76X02

"X" joint for three-phase electrified track.

