

Brooklyn Out

24V DC
XP2033-200TRACK PR

 white/prismatic screen




Data sheet

CODE	XP2033-200TRACK PR
SYSTEM POWER CONSUMPTION	max 24W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	anti-glare
BEAM ANGLE	51° / 82°
POWER SUPPLY	24V DC
DRIVER	remote not included
GLARE RATING	UGR < 19
WEIGHT	1,32 Kg
PROTECTION DEGREE	IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	6,0 x 6,0 x 214,0 cm
L (mm)	2025
L (in)	79 7/9"



Modular profile for suspended or ceiling installation for interiors, with direct light emission.
Extruded aluminium structure in RAL 9003 white powder paint.
Micro-prismatic extruded polycarbonate diffuser.
Light modules and driver to be ordered separately.
Connection, fastening, joining and closing accessories to be ordered separately.

Technical drawing

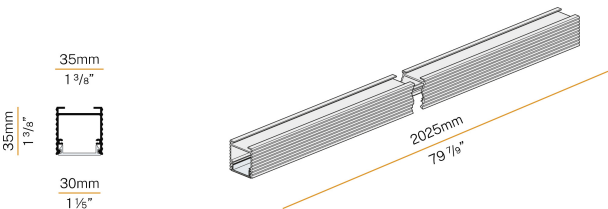

Application



Polar diagram

