

# PANZERI

## Brooklyn Out

24V DC

XP2033-300TRACK

 white/opal screen



### Data sheet

CODE	XP2033-300TRACK
SYSTEM POWER CONSUMPTION	max 24W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	1,94 Kg
PROTECTION DEGREE	IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	6,0 x 6,0 x 314,0 cm
L (mm)	3025
L (in)	119 1/5"



Modular profile for suspended or ceiling installation for interiors, with direct light emission.


Extruded aluminium structure in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish.

Light modules and driver to be ordered separately.

Connection, fastening, joining and closing accessories to be ordered separately.


### Technical drawing

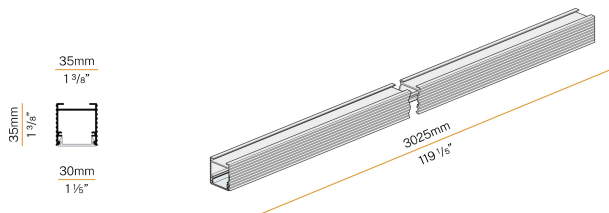

### Application



### Polar diagram

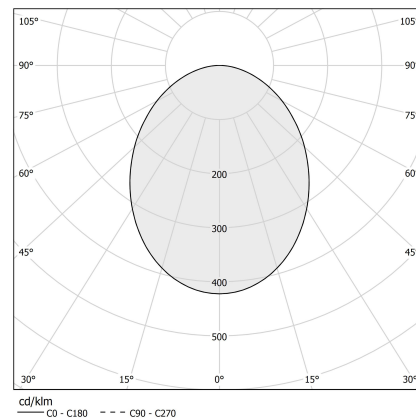

# PANZERI

## Brooklyn Out

### Accessories / source

---

XM006.012.0410 LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



---

XM006.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



---

YLR002.017.0410 Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 3000K Ra>90 1810lm/m, to be cut each 42mm (1,7").



---

YLR002.017.0610 Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 4000K Ra>90 1920lm/m, to be cut each 42mm (1,7").



---

YLR003.010.0410 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 3000K Ra>90 930lm/m, to be cut each 42mm (1,7").



---

YLR003.010.0510 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 2700K Ra>90 882lm/m, to be cut each 42mm (1,7").



---

YLR003.010.0610 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 4000K Ra>90 980lm/m, to be cut each 42mm (1,7").



# PANZERI

## Brooklyn Out

### Accessories / power supply


XM100/24 DIM

LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM150/24 DIM

LED driver, 150W 24V DC, DALI/Push DIM dimmable.




XM18/24 DIM

LED driver, 18W 24V DC, DALI/Push DIM dimmable.




XM2033-ST120W

Power supply kit with white canopy, 120W driver, power cable with length 2,2m (86,6").




XM2033-ST150W DIM

Power supply kit with white canopy, 150W DALI/Push DIM dimmable driver, power cable with length 2,2m (86,6").




XM2033-T120W

Power supply kit with white canopy and 120W driver.




XM2033-T150W DIM

Power supply kit with white canopy and 150W DALI/Push DIM dimmable driver.




XM35/24 DIM

LED driver, 35W 24V DC, DALI/Push DIM dimmable.



XM6-20 UNI

LED driver, 4x20W 250±700mA.




# PANZERI

## Brooklyn Out

### Accessories / power supply


XM60/24 DIM

LED driver, 60W 24V DC, DALI/Push DIM dimmable.



YDV.024.030.A01

LED driver, 30W 24V DC.



YDV.024.120.A01

LED driver, 120W 24V DC.



YDV.024.180.A01

LED driver, 180W 24V DC.



# PANZERI

## Brooklyn Out

### Accessories / connection

---

XM2033/34/32/31-S

Power cables.



# PANZERI

## Brooklyn Out

### Accessories / diffusion


XM2033/34-WHI

White reflector with 1000mm (39,4") length to be cut.




XM2033/34/45/46-1200S

Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.




XM2033/34/45/46-600S

Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



XM2033/34/45/46-900S

Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.




# PANZERI

## Brooklyn Out

### Accessories / fixing

XM-KIT-S

Single suspension kit, with 2000mm (78 4/5") long steel wire.



XM231/32-P

Spacer for ceiling/wall installation.




# PANZERI

## Brooklyn Out

### Accessories / junction


XM2033-A

Pair of adhesive light covers for junctions.




XM2033-U90 XP

Connection joint for two lines of modular profiles with level junction 90°, for suspended or ceiling installation.



XM2033/34-U

Linear junction.





# PANZERI

## Brooklyn Out

### Accessories / closing

---

XM2033-T1

Pair of end caps with screws for suspended or ceiling mounted profiles.

