

Giano


220-240V AC
XP24648.050.0099

black/opal screen




Data sheet

CODE	XP24648.050.0099
SYSTEM POWER CONSUMPTION	max 48W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
DRIVER	integrated not included
WEIGHT	1,19 Kg
PROTECTION DEGREE	IP40
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	12,5 x 63,0 x 14,0 cm
L (mm)	515
L (in)	20 2/7"

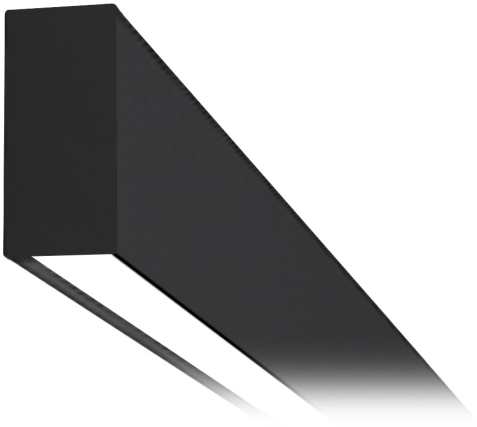


Modular profile for suspended or wall installation for interiors, with direct and indirect light emission.
Extruded aluminium structure in RAL 9003 white or black powder paint.
Extruded polycarbonate diffusers with opaline finish.
Light modules and driver to be ordered separately.
Micro-prismatic extruded polycarbonate diffuser to be ordered separately.
Connection, fastening, joining and closing accessories to be ordered separately.

Technical drawing

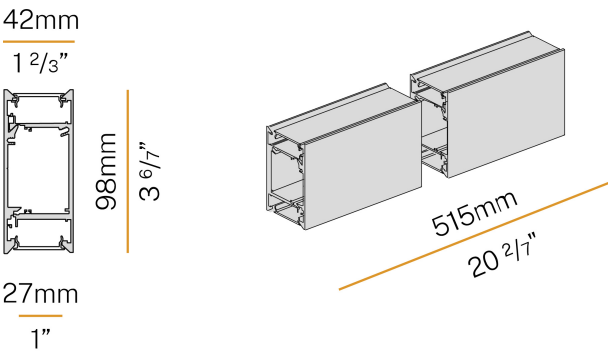

Polar diagram

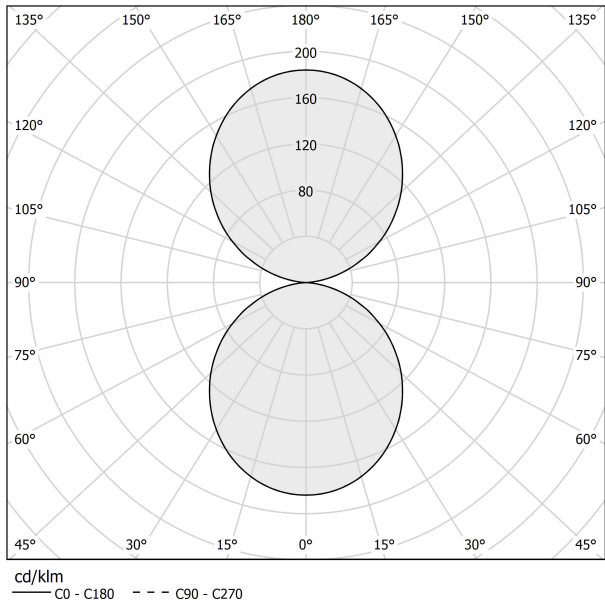

Accessories / source

XM006.012.0410 LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



XM006.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



YLR001.022.0110 Strip LED, 5000mm (196,9") 160 LED/m 21,6W/m 24V DC 3000K Ra>80 3020lm/m, to be cut each 50mm (2").



YLR002.017.0410 Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 3000K Ra>90 1810lm/m, to be cut each 42mm (1,7").



YLR002.017.0610 Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 4000K Ra>90 1920lm/m, to be cut each 42mm (1,7").



YLR003.010.0410 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 3000K Ra>90 930lm/m, to be cut each 42mm (1,7").



YLR003.010.0510 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 2700K Ra>90 882lm/m, to be cut each 42mm (1,7").




YLR003.010.0610 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 4000K Ra>90 980lm/m, to be cut each 42mm (1,7").



Accessories / power supply


XM2038/46-3

Power supply kit with white canopy, 3 pole power cable with lenght 2,2m (86,6").




XM2038/46-5

Power supply kit with white canopy, 5 pole power cable with lenght 2,2m (86,6").




XM30/24I

LED driver, 30W 24V DC.




XM35/24I DIM

LED driver, 35W 24V DC, DALI/Push DIM dimmable.




Accessories / diffusion


XM2033/34/45/46-1200S Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.




XM2033/34/45/46-1200S PR Micro-prismatic extruded polycarbonate diffuser, 12000mm (472,4") long.




XM2033/34/45/46-600S Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.




XM2033/34/45/46-600S PR Micro-prismatic extruded polycarbonate diffuser, 6000mm (236,2") long.



XM2033/34/45/46-900S Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.



XM2033/34/45/46-900S PR Micro-prismatic extruded polycarbonate diffuser, 9000mm (354,3") long.




PANZERI

Giano

Accessories / fixing


XM246-02-KIT-S

Pair of suspension kits, with 2000mm (78 4/5") long steel wire.



XM246-02-KIT-S1

Single suspension kit for junctions, with 2000mm (78 4/5") long steel wire.



Accessories / junction

XM246-U

Linear junction kit.



Accessories / closing

XM246-02T

Pair of end caps.

