

PANZERI

Giano

220-240V AC


XP24648.200.0099

 black/opal screen



Data sheet

| | |
|----------------------------|-------------------------|
| CODE | XP24648.200.0099 |
| SYSTEM POWER CONSUMPTION | max 48W/m |
| LIGHT SOURCE | LED |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| DRIVER | integrated not included |
| WEIGHT | 4,66 Kg |
| PROTECTION DEGREE | IP40 |
| GLOW WIRE TEST PERFORMANCE | 850° |
| PACKING DIMENSIONS | 12,5 x 224,0 x 14,0 cm |
| L (mm) | 2015 |
| L (in) | 79 2/5" |

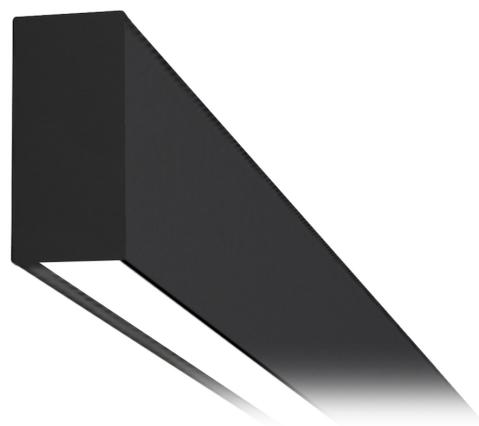

Modular profile for suspended or wall installation for interiors, with direct and indirect light emission.

Extruded aluminium structure in RAL 9003 white or black powder paint.


Extruded polycarbonate diffusers with opaline finish.

Light modules and driver to be ordered separately.


Micro-prismatic extruded polycarbonate diffuser to be ordered separately.

Connection, fastening, joining and closing accessories to be ordered separately.

Technical drawing

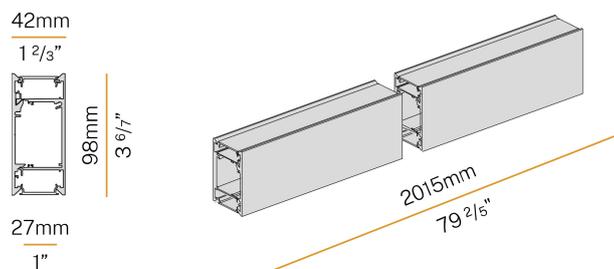

Polar diagram

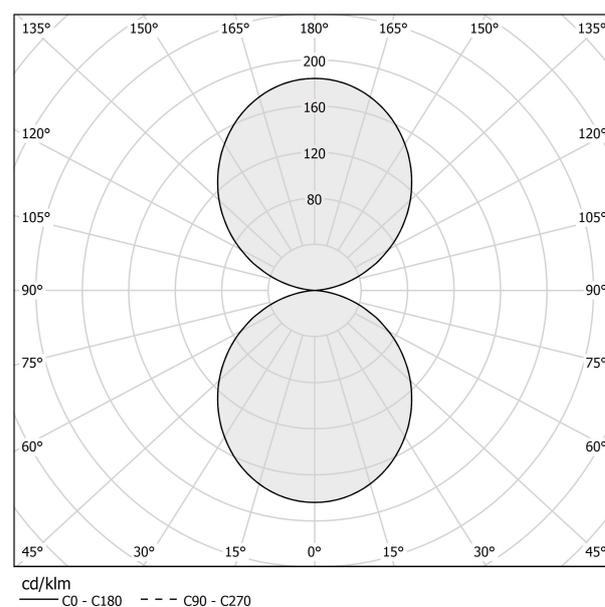

PANZERI

Giano

Accessories / source

XM006.012.0410 LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 285lm.



XM006.050.0410 LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.



YLR001.022.0110 Strip LED, 5000mm (196,9") 160 LED/m 21,6W/m 24V DC 3000K Ra>80 3020lm/m, to be cut each 50mm (2").



YLR002.017.0410 Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 3000K Ra>90 1810lm/m, to be cut each 42mm (1,7").



YLR002.017.0610 Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 4000K Ra>90 1920lm/m, to be cut each 42mm (1,7").



YLR003.010.0410 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 3000K Ra>90 930lm/m, to be cut each 42mm (1,7").



YLR003.010.0510 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 2700K Ra>90 882lm/m, to be cut each 42mm (1,7").



YLR003.010.0610 Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 4000K Ra>90 980lm/m, to be cut each 42mm (1,7").



PANZERI

Giano

Accessories / power supply


XM100/24I DIM

LED driver, 100W 24V DC, DALI/Push DIM dimmable.




XM120/24I

LED driver, 120W 24V DC.




XM2038/46-3

Power supply kit with white canopy, 3 pole power cable with length 2,2m (86,6").



XM2038/46-5

Power supply kit with white canopy, 5 pole power cable with length 2,2m (86,6").



PANZERI

Giano

Accessories / diffusion

XM2033/34/45/46-1200S Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4") long.



XM2033/34/45/46-1200S PR Micro-prismatic extruded polycarbonate diffuser, 12000mm (472,4") long.



XM2033/34/45/46-600S Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2") long.



XM2033/34/45/46-600S PR Micro-prismatic extruded polycarbonate diffuser, 6000mm (236,2") long.



XM2033/34/45/46-900S Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3") long.



XM2033/34/45/46-900S PR Micro-prismatic extruded polycarbonate diffuser, 9000mm (354,3") long.




PANZERI

Giano

Accessories / fixing

XM246-02-KIT-S Pair of suspension kits, with 2000mm (78 4/5") long steel wire.



XM246-02-KIT-S1 Single suspension kit for junctions, with 2000mm (78 4/5") long steel wire.



PANZERI

Giano

Accessories / junction

XM246-U

Linear junction kit.



PANZERI

Giano

Accessories / closing

XM246-02T

Pair of end caps.

